
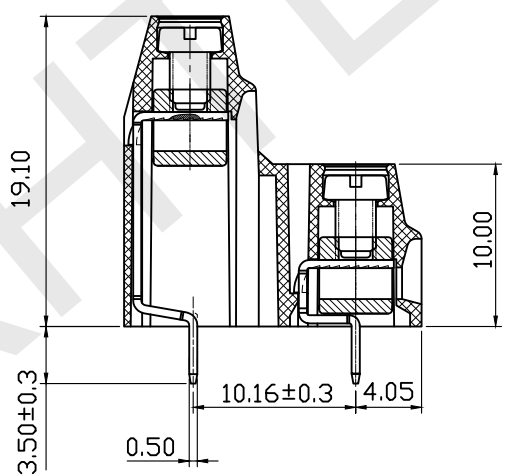


PCB LAYOUT

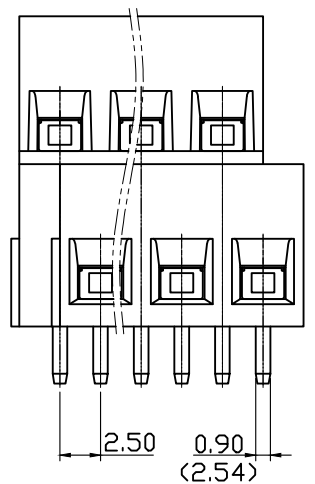


Material
 Housing: PA66, UL94V-0
 Clamp: Brass, Ni plated
 Pin header: Brass, Tin plated
 Screw: M2.5, steel Zinc plated

Electrical
 Rated voltage: 300V
 Rated current: 15A
 Contact Resistance: 20Ω
 Insulation resistance: 500MΩ/DC500V
 Withstand voltage: AC2000V/1min
 Wire Range: 26~14AWG 1.5mm²

Mechanical
 Temp.Range: -40℃~+105℃
 Strip length: 6~7mm
 Torque: 0.4Nm (3.5Lb.in)

Order information

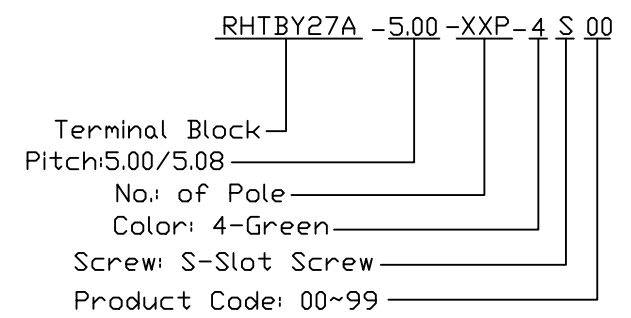

G	NINGBO RHT ELECTRONIC CO.,LTD	UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN	Screw CONN TERM Block 5.00mm			
		0~3	3~18	18~50	50~120	CHK'D BY FENG	THIRD ANGLE PROJECTION 	RHTBY27A-5.00-XXP-4S	
		±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN			