
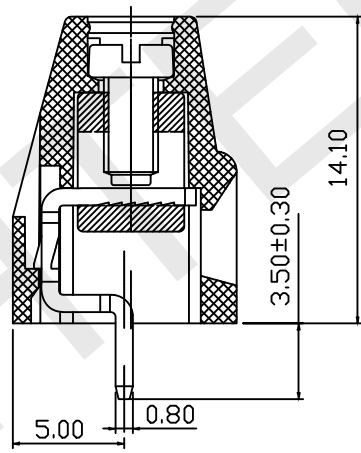


PCB LAYOUT

Material
 Screw: M2.5, Steel,Zn plated
 Cage: Brass,Nickel plated
 Pin header: Brass, Tin plated
 Housing: PA66. UL94V-0

Electrical
 Rated voltage:300V
 Rated current: 16A
 Wire range:22~12AWG 2.5mm²
 Contact Resistance:20 mΩ
 Insulation resistance: 500MΩ/DC500V
 Withstand voltage: AC2000V/1min

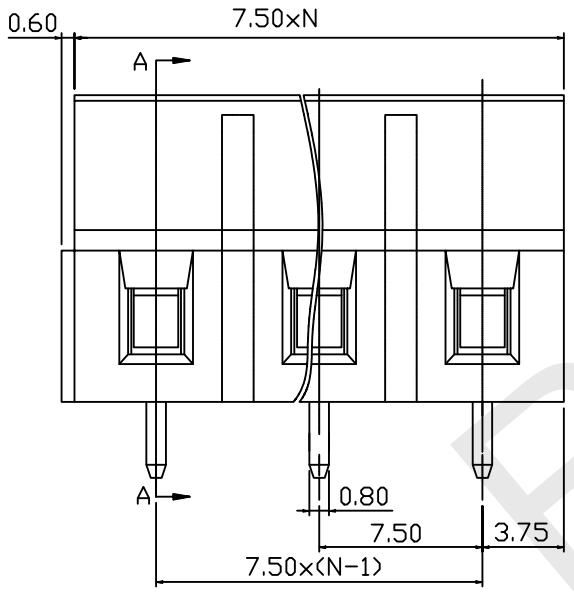

SECTION A-A

Mechanical
 Temp.Range: -40℃~+105℃
 Soldering: 250℃ 5Sec. Max.
 Torque: 0.4 N.m (3.54 Lb. in)
 Strip length: 6~7mm


Order Information

RHTBY28 -7.50 -XXP -4 S XX
 Terminal Block ———
 Pitch ———
 No.: of Pole ———
 Product Cde:00~99
 Screw:S-Slot Screw
 C-Cross Screw
 Color:4-Green



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4				SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	Screw Conn Term Block 7.50mm	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	THIRD ANGLE PROJECTION	RHTBY28-7.50-XXP-4S



RHTBY28-7.50-XXP-4S