
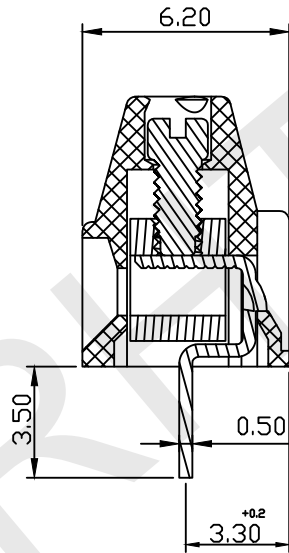


PCB LAYOUT

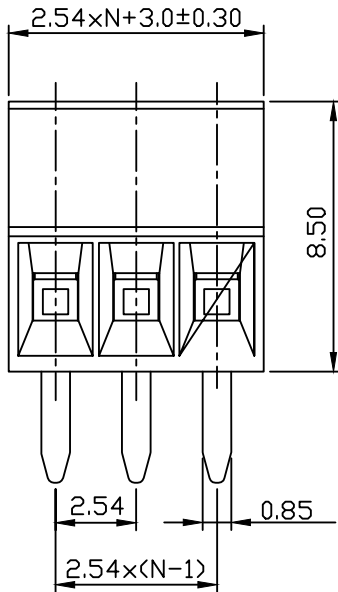

SECTION

Material
 Screw: M1.5, steel, Zn plated
 Cage: Brass, Nickel plated
 Pin header: Brass, Tin plated
 Housing: PA66, UL94V-0, Green

Electrical
 Rated voltage: 125V
 Rated current: 6A
 Wire Range: 28~18AWG 1.0mm²
 Contact Resistance: 20mΩ
 Insulation resistance: 500MΩ/DC500V
 Withstand voltage: AC1250V/1min

Mechanical
 Temp. Range: -40℃~+105℃
 Soldering: 250℃ 5Sec. Max.
 Torque: 0.45Nm(1.3Lb.)in
 Strip length: 3.7~4.7mm

Order Information

RHTBY08V- 2.54-XXP- 4 S XX
 Terminal Block
 Pitch
 No. of Pole
 Color: 4-Green
 Screw: S-Slot Screw
 Code: Product Code: 00~99



NINGBO RHT ELECTRONIC CO.,LTD

| | | | |
|---------------|----------------|--------------|-------------|
| UNITS:mm | SHEET SIZE: A4 | SCALE:--- | DRWN BY PAN |
| 0~3 | 3~18 | 18~50 | 50~120 |
| ±0.12 | ±0.15 | ±0.3 | ±0.5 |
| CHK'D BY FENG | | APPR BY ZHAN | |

| | |
|--|---------------------|
| 2.54mm Screw Terminal Block Rising Clamp | |
| THIRD ANGLE PROJECTION | RHTY08V-2.54-XXP-4S |

