

PCB LAYOUT

Material

Pin header: Brass, Tin plated

Housing: PBT,UL94V-0

Electrical

Rated voltage: 300V

Rated current:10A

Contact Resistance: 20 mΩ

Insulation resistance:500MΩ/DI500V

Withstand voltageAC2000V/1min


Mechanical

Temp.Range:-30℃~+ 105℃

Soldering:250℃ 5Sec.Max

Order Information

RHTBY32J-5.00-XXP-3 XX

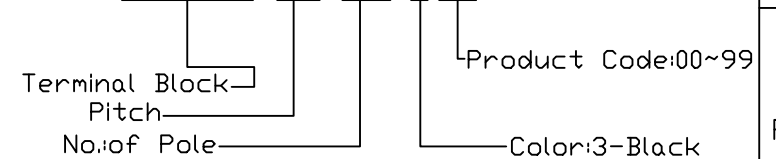

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

Screw Conn Term Block 5.00mm
 THIRD ANGLE PROJECTION
 RHTBY32J-5.00-XXP-3