

Material

Housing:PA66, UL94V-0

Cage:Brass,Ni plated

Clamp:Phosphor bronze, Ni plated

Screws:M3.0, Steel,Zn plated

Electrical

Rated voltage:300V

Rated current:15A

Contact Resistance:20mΩ

Insulation resistance:500MΩ/DC500V

Withstand voltage:AC2000V/1min

Wire Range:28~14AWG1.5mm<sup>2</sup>

Mechanical

Temp. Range:-40℃+105℃

Strip length:7~8mm

Torque:0.5Nm(4.5Lbin)

Order Information

RHTBYDKBM-5.00-XXP-4 S 00

Terminal Block

Pitch

No. of Pole


Color:4-Green





Screw:S-Slot Screw C-Cross Screw

Product Code: 00~99

 NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

Pluggable Terminal Block 5.00MM  
 THIRD ANGLE PROJECTION  
  
 RHTBYEDBM-5.00-XXP-4S-00

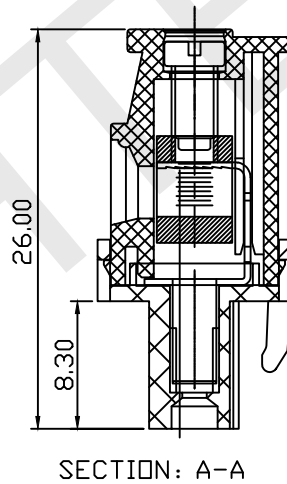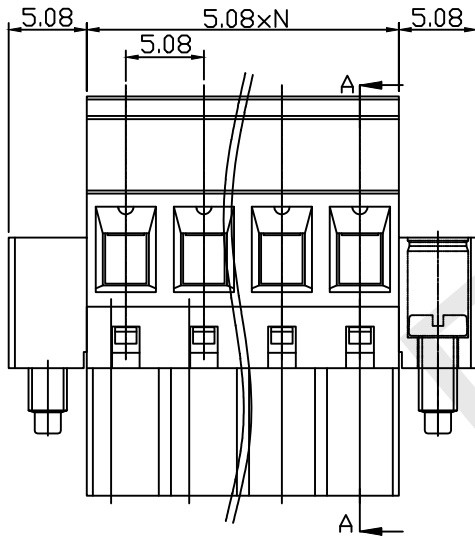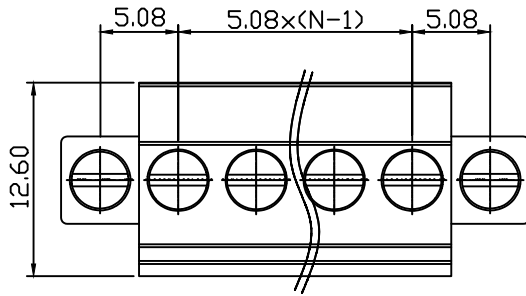

Material  
 Housing:PA66, UL94V-0  
 Cage:Brass,Ni plated  
 Clamp:Phosphor bronze, Ni plated  
 Screws:M3.0, Steel,Zn plated

Electrical  
 Rated voltage:300V  
 Rated current:15A  
 Contact Resistance:20mΩ  
 Insulation resistance:500MΩ/DC500V  
 Withstand voltage:AC2000V/1min  
 Wire Range:28~14AWG1.5mm<sup>2</sup>

Mechanical  
 Temp. Range:-40℃+105℃  
 Strip length:7~8mm  
 Torque:0.5Nm(4.5Lbin)

Order Information

RHTBYDKBM-5.08-XXP-4 S 00  
 Terminal Block  
 Pitch  
 No. of Pole  
 Color:4-Green  
 Screw:S-Slot Screw C-Cross Screw  
 Product Code: 00~99

NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

Pluggable Terminal Block 5.08MM  
 THIRD ANGLE PROJECTION  
 RHTBYEDBM-5.08-XXP-4S-00