


Material
 Housing:PA66, UL94V-0
 Cage:Brass,Ni plated
 Clamp:Phosphor bronze, Ni plated
 Screws:M3.0, Steel,Zn plated

Electrical
 Rated voltage:300V
 Rated current:15A
 Contact Resistance:20mΩ
 Insulation resistance:500MΩ/DC500V
 Withstand voltage:AC2000V/1min
 Wire Range:28~14AWG1.5mm²

Mechanical
 Temp. Range:-40℃+105℃
 Strip length:7~8mm
 Torque:0.5Nm(4.5Lbin)

Order Information

RHTBYDKBM-5.00-XXP-4 S 00

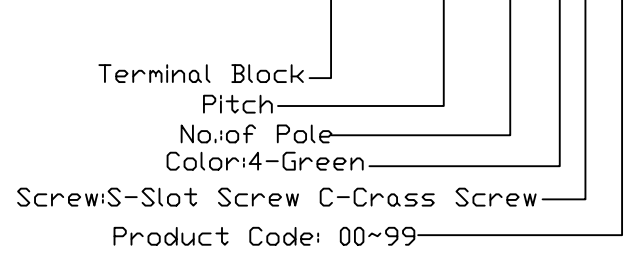

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

Pluggable Terminal Block 5.00MM
 THIRD ANGLE PROJECTION
 RHTBYDKBM-5.00-XXP-4S-00