

SECTION A-A

Material
 Housing:PA66, UL94V-0
 Pin header:Brass,Tin plated
 Nut:M2.5,Brass

Electrical
 Rated voltage:300V
 Rated current:15A
 Contact Resistance:20mΩ
 Insulation resistance:500MΩ/DC500V
 Withstand voltage:A2000V/1min

Mechanical
 Temp.Range:-40℃+105℃

Order Information




RHTBYDVY- 5.00 -XXP-4 00

Terminal Block _____
 Pitch _____
 No: of Pole _____
 Color: 4-Green _____
 Product Code: 00~99 _____

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5
			CHK'D BY FENG
			APPR BY ZHAN

Pluhhable Terminal Block 5.00 MM
 THIRD ANGLE PROJECTION
 RHTBYDVY-5.00-XXP-4-00

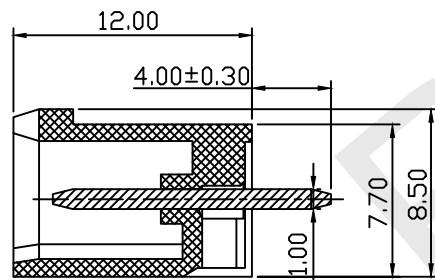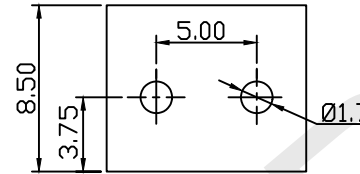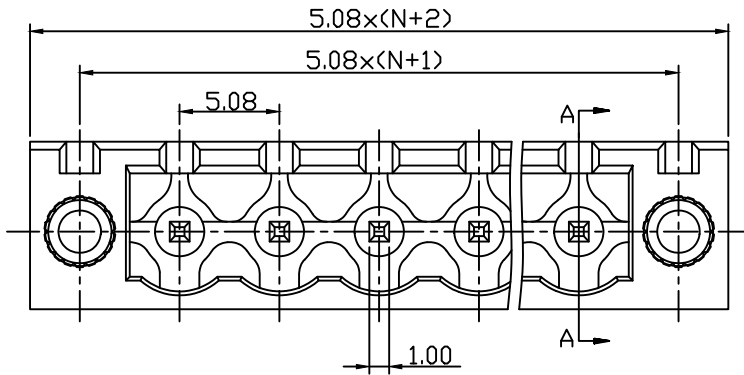

SECTION A-A

Material
 Housing:PA66, UL94V-0
 Pin header:Brass,Tin plated
 Nut:M2.5,Brass

Electrical
 Rated voltage:300V
 Rated current:15A
 Contact Resistance:20mΩ
 Insulation resistance:500MΩ/DC500V
 Withstand voltage:A2000V/1min

Mechanical
 Temp.Range:-40°C+105°C


Order Information

RHTBYDVY- 5.08 -XXP-4 00

Terminal Block _____
 Pitch _____
 No: of Pole _____
 Color: 4-Green _____
 Product Code: 00~99 _____

 NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5
			CHK'D BY FENG
			APPR BY ZHAN

Pluggable Terminal Block 5.08 MM
 THIRD ANGLE PROJECTION
 RHTBYDVY-5.08-XXP-4-00