

SECTION A-A

Material

Housing: PA66, UL94 V-0

Pin header: Brass, Tin plated

Nut: M2.5 Brass

Electrical

Rated voltage: 300V

Rated current: 15A


Contact Resistance: 20mΩ

Insulation resistance: 500MΩ/DC500V

Withstand voltage: AC2000V/1min

Mechanical

Temp. Range: -40°C ~ +105°C

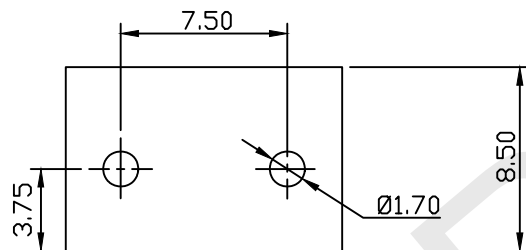

Order Information

RHTBYDV-7.50-XXP-4 00

Terminal Block

Pitch

No. of Pole

Color: 4-Green


Product Code: 00~99

 NINGBO RHT ELECTRONIC CO.,LTD



UNITS:mm	SHEET SIZE: A4				SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG		
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN		

Pluggable Terminal Block 7.50 MM

THIRD ANGLE PROJECTION



RHTBYDV-7.50-XXP-4-00

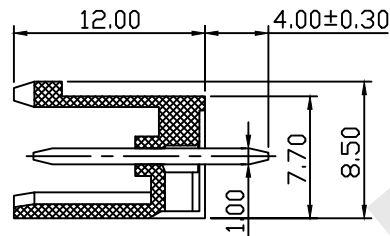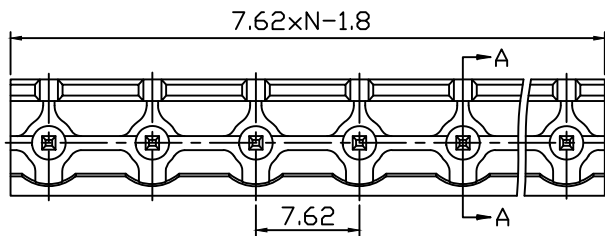

SECTION A-A

Material

Housing: PA66, UL94 V-0

Pin header: Brass, Tin plated

Nut: M2.5 Brass

Electrical

Rated voltage: 300V

Rated current: 15A


Contact Resistance: 20mΩ

Insulation resistance: 500MΩ/DC500V

Withstand voltage: AC2000V/1min

Mechanical

Temp. Range: -40°C ~ +105°C

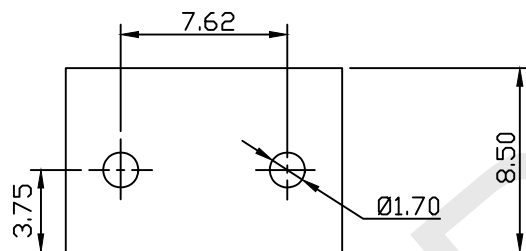

Order Information

RHTBYEDV-7.62-XXP-4 00

Terminal Block

Pitch

No. of Pole

Color: 4-Green

Product Code: 00~99

 NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE: ---

DRWN BY PAN

Pluggable Terminal Block 7.62 MM

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

RHTBYEDV-7.62-XXP-4-00


±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



1

2

3

4

5

6

7

8

9