


Material
 Housing:PA66, UL94V-0
 Pin header:Brass, Tin plated
 Nut:M2.5 Brass


Electrical
 Rated voltage:300V
 Rated current:15A
 Contact Resistance:20 mΩ
 Insulation resistance:500MΩ/DC500V
 Withstand voltage:AC2000V/1min

Mechanical
 Temp.Range:-40℃~+ 105℃

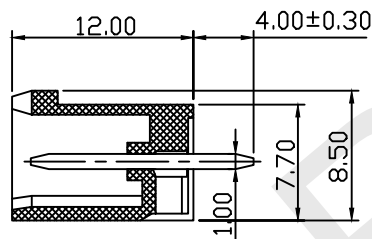

SECTION A-A



Order Information

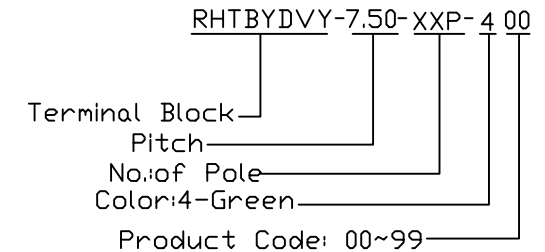

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4		SCALE:---		DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	


Pluggable Terminal BLOCK 7.50MM	
THIRD ANGLE PROJECTION 	RHTBYDVY-7.50-XXP-4-00

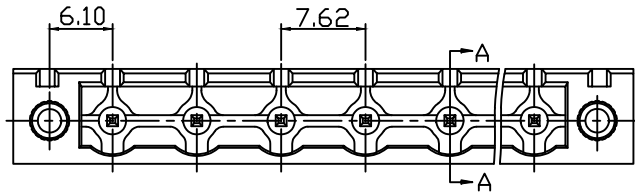

Material
 Housing:PA66, UL94V-0
 Pin header:Brass, Tin plated
 Nut:M2.5 Brass

Electrical
 Rated voltage:300V
 Rated current:15A
 Contact Resistance:20 mΩ
 Insulation resistance:500MΩ/DC500V
 Withstand voltage:AC2000V/1min

Mechanical
 Temp.Range:-40℃~+ 105℃

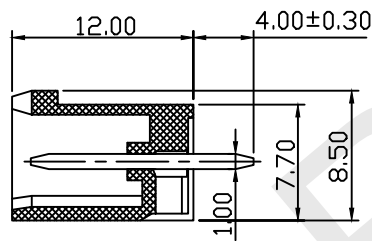


SECTION A-A

Order Information

RHTBYDVY-7.62-XXP-4 00
 Terminal Block
 Pitch
 No. of Pole
 Color:4-Green
 Product Code: 00~99

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4		SCALE:---		DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

Pluggable Terminal BLOCK 7.62MM
 THIRD ANGLE PROJECTION
 RHTBYDVY-7.62-XXP-4-00