

**Material**

Housing: PA66, UL94V-0  
 Clamp: Phosphor bronze, Tin Plated  
 Shrapnel: Stainless steel  
 Screw: M3 Steel, Zn plated  
 Fix screw: Steel, Zn plated


**Electrical**

Rated voltage: 300V  
 Rated current: 8A  
 Contact Resistance: 20 mΩ  
 Insulation resistance: 500MΩ/DC500V  
 Withstand voltage AC2000V/1min  
 Wire Range: 24~16AWG1.0mm<sup>2</sup>

**Mechanical**

Temp. Range: -40°C~105°C  
 Strip length: 9~10mm

**Order Information**

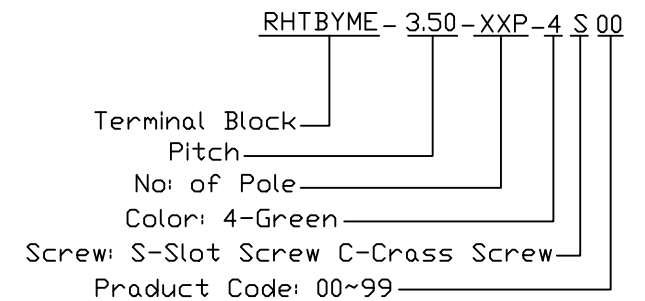

**RHTECP** NINGBO RHT ELECTRONIC CO.,LTD

|          |                |       |        |               |             |
|----------|----------------|-------|--------|---------------|-------------|
| UNITS:mm | SHEET SIZE: A4 |       |        | SCALE: ---    | DRWN BY PAN |
| 0~3      | 3~18           | 18~50 | 50~120 | CHK'D BY FENG |             |
| ±0.12    | ±0.15          | ±0.3  | ±0.5   | APPR BY ZHAN  |             |

|                           |                        |
|---------------------------|------------------------|
| Plug-in RERM BLOCK 3.50MM |                        |
| THIRD ANGLE PROJECTION    | RHTBYME-3.50-XXP-4S-00 |