
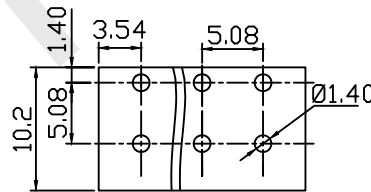


SECTION

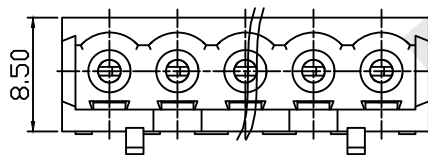

PCB LAYOUT

Material

Pin header: Phosphor Bronze, Tin plated

Housing: PA66, UL94V-0

Electrical

Rated voltage: 300V

Rated current: 15A

Contact Resistance: 20 mΩ

Insulation resistance: 500MΩ/DI500V


Withstand voltage: AC2000V/1min

Mechanical

Temp. Range: -40°C~+105°C


Soldering: 250°C 5Sec.Max

Order Information

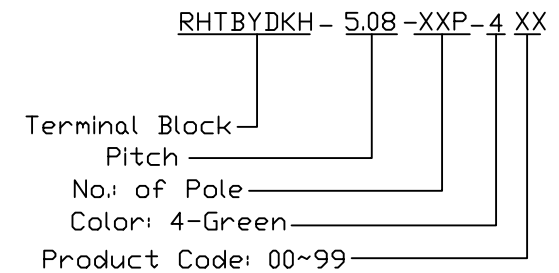

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4				SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	THIRD ANGLE PROJECTION	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	RHTBYDKR-5.08-XXP-4-XX	



Plug-in TERM BLOCK 5.08MM

RHTBYDKR-5.08-XXP-4-XX