

Material

Housing:PA66, UL94V-0

Coge:Brass,Ni plated

Clamp:Phosphor bronze, Ni plated

Screws:M3.0, Steel,Zn plated

Electrical

Rated voltage:300V

Rated current:15A

Contact Resistance:20mΩ

Insulation resistance:500MΩ/DC500V

Withstand voltage:AC2000V/1min

Wire Range:28~14AWG 15mm²

Mechanical

Temp. Range:-40℃~+105℃

Strip length:7~8mm

Torque:0.5Nm(4.5Lbin)

Order Information

RHTBYDKB -5.00-XXP-4 S 00

Terminal Block ————

Pitch ————

No. of Pole ————

Color: 4-Green ————

Screw: S-Slot Screw C-Cross Screw ————

Product Code: 00~99 ————

RHTECP NINGBO RHT ELECTRONIC CO.,LTD





UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

Pluggable Terminal Block 5.00 MM

THIRD ANGLE PROJECTION



RHTBYDKB-5.00-XXP-4S-00

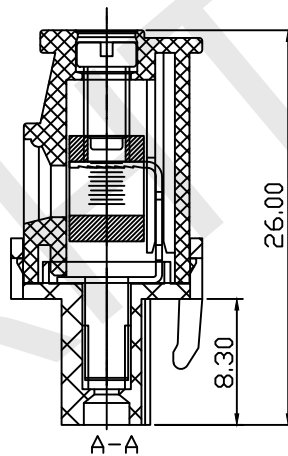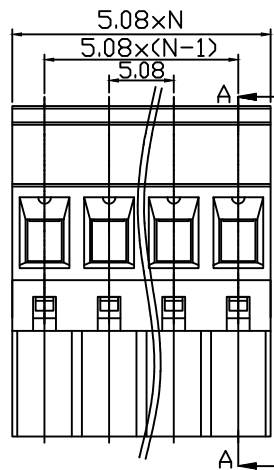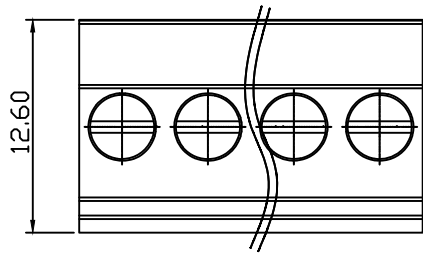

Material

Housing:PA66, UL94V-0

Coge:Brass,Ni plated

Clamp:Phosphor bronze, Ni plated

Screws:M3.0, Steel,Zn plated

Electrical

Rated voltage:300V

Rated current:15A

Contact Resistance:20mΩ

Insulation resistance:500MΩ/DC500V

Withstand voltage:AC2000V/1min

Wire Range:28~14AWG 15mm²

Mechanical

Temp. Range:-40℃~+105℃

Strip length:7~8mm

Torque:0.5Nm(4.5Lbin)

Order Information

RHTBYDKB-5.08-XXP-4 S 00


Terminal Block
Pitch
No. of Pole
Color: 4-Green
Screw:S-Slot Screw C-Cross Screw
Product Code: 00~99

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

Pluggable Terminal Block 5.08 MM

THIRD ANGLE PROJECTION



RHTBYDKB-5.08-XXP-4S-00