


Material
 Housing:PA66, UL94V-0
 Cage:Brass,Ni plated
 Clamp:Phosphor bronze, Ni plated
 Screws:M2.0, Steel,Zn plated

Electrical
 Rated voltage:300V
 Rated current:8A
 Contact Resistance:20 mΩ
 Insulation resistance: 500MΩ/DC500V
 Withstand voltage:AC2000V/1min
 Wire Range:28~16AWG 1.0mm²

Mechanical
 Temp.Range:-40℃~+105℃
 Strip length:6~7mm
 Torque:0.2Nm(1.7Lbin)

Order Information

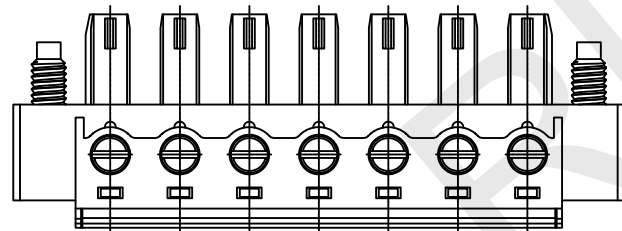

RHTBYDKFFM-5.08-XXP-4S00


Terminal Block —
 Pitch —
 No. of Pole —
 Color: 4-Green —
 Screw: S-Slot Screw C-Cross Screw —
 Product Code: 00~99 —

 NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

Pluggable Terminal Block 5.08 MM

THIRD ANGLE PROJECTION



RHTBYDKFFM-5.08-XXP-4S-00