
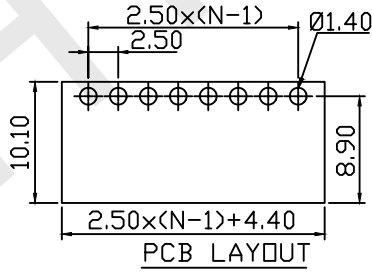


Material  
 Housing:PA66, UL94V-0  
 Pin header:Brass, Tin plated

Electrical  
 Rated voltage:150V  
 Rated current:5A  
 Contact Resistance:20 mΩ  
 Insulation resistance: 500MΩ/DC500V  
 Withstand voltage:AC1250V/1min


Mechanical  
 Temp. Range:-40°C+105°C

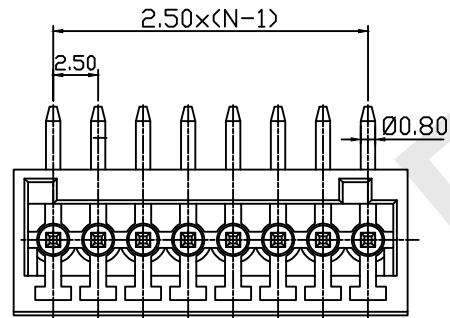

PCB LAYOUT

GENERAL TOLERANCE ANGLE TOLERANCE

Order Information

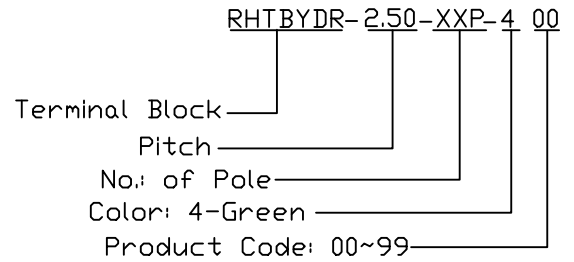

**RHTECP** NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

Pluggable Terminal Block 2.50MM  
 THIRD ANGLE PROJECTION  
 RHTBYDR-2.50-XXP-4-00