
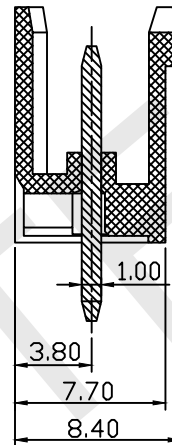


PCB LAYOUT

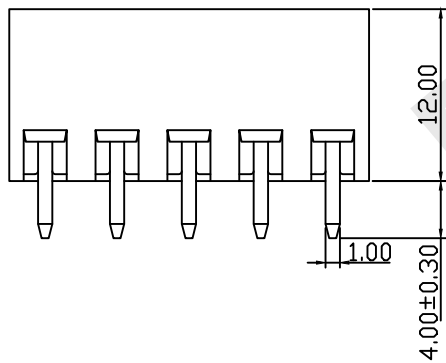

Material

Pin header: Brass, Tin plated

Housing: PA66, UL94V-0

Electrical

Rated voltage: 300V

Rated current: 15A

Contact Resistance: 20 mΩ

Insulation resistance: 500M Ω/D[500V

Withstand voltage: AC2000V/1min


Mechanical

Temp. Range: -40 °C ~ +105 °C

Soldering: 250 °C 5Sec.Max

Order Information



RHTBYDV-5.00-XXP-4 XX

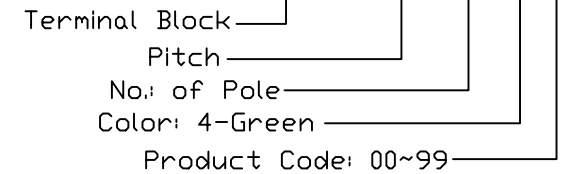



RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4		SCALE:---		DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

Pluggable Terminal Block 5.00MM
 THIRD ANGLE PROJECTION
 RHTBYDV-5.00-XXP-4

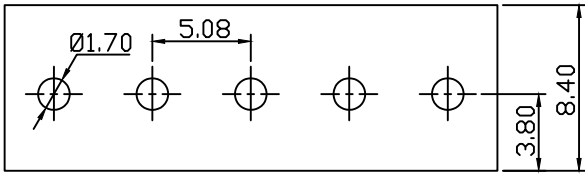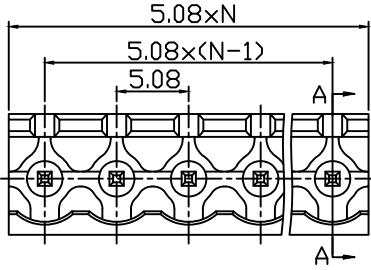

PCB LAYOUT

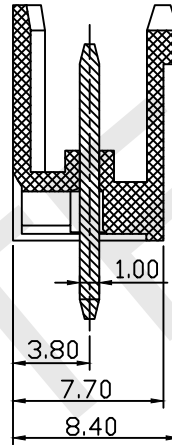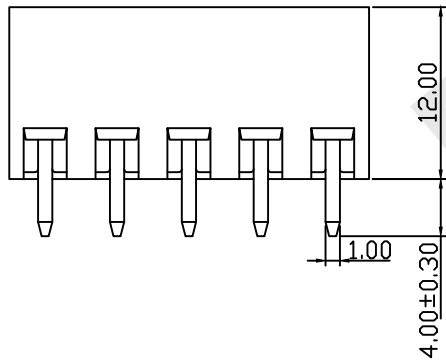

Material

Pin header: Brass, Tin plated

Housing: PA66, UL94V-0

Electrical

Rated voltage: 300V

Rated current: 15A

Contact Resistance: 20 mΩ

Insulation resistance: 500MΩ/D[500V

Withstand voltage: AC2000V/1min


Mechanical

Temp. Range: -40℃~+105℃

Soldering: 250℃ 5Sec.Max

Order Information

RHTBYDV-5.08-XXP-4 XX

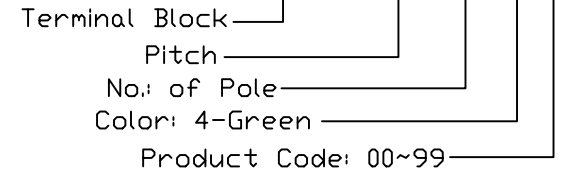

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4				SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	THIRD ANGLE PROJECTION	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN		

Pluggable Terminal Block 5.08MM

RHTBYDV-5.08-XXP-4