


TOLERANCES EXCEPT AS NOTED

Material
Housing: PA66, UL94V-0
Pin header: Brass, Tin plated

Electrical
Rated voltage: 300V
Rated current: 15A
Contact Resistance: 20mΩ
Insulation resistance: 500MΩ/DC500V
Withstand voltage: AC2000V/1min

Mechanical
Temp. Range: -40°C~+105°C




Order Information

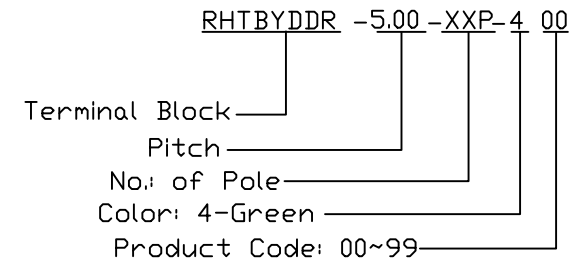

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

Pluggable Terminal Block 5.00MM
THIRD ANGLE PROJECTION
 RHTBYDDR-5.08-XXP-4-00

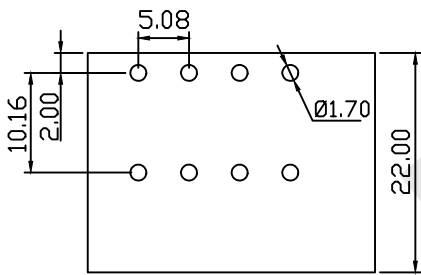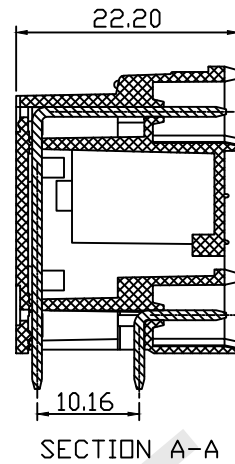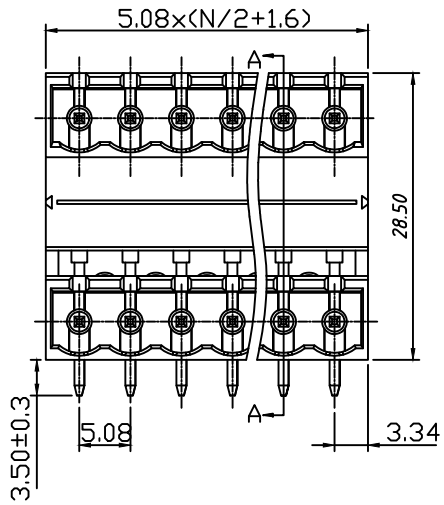


TOLERANCES EXCEPT AS NOTED

Material
Housing:PA66, UL94V-0
Pin header:Brass, Tin plated

Electrical
Rated voltage:300V
Rated current:15A
Contact Resistance:20mΩ
Insulation resistance:500MΩ/DC500V
Withstand voltage:AC2000V/1min

Mechanical
Temp. Range:-40℃~+105℃

Order Information

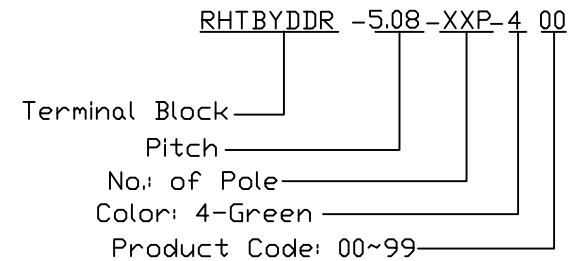

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

Pluggable Terminal Block 5.08MM
THIRD ANGLE PROJECTION
RHTBYDDR-5.08-XXP-4-00