


Material  
 Housing:PA66, UL94V-0  
 Shrapnel:Stainless steel  
 Clamp:Phosphor bronze, Nickel plated

Electrical  
 Rated voltage:150V  
 Rated current:5A  
 Contact Resistance:20 mΩ  
 Insulation resistance:500MΩ/DC500V  
 Wire Range:26~20AWG 0.5mm<sup>2</sup>

Mechanical!  
 Temp.Range:-40℃~+ 105℃  
 Strip length:8mm

Order Information

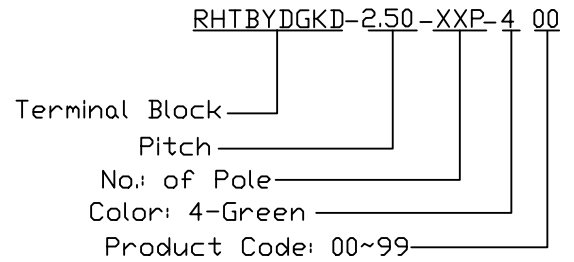

**RHTECP** NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

Pluggable Terminal Block 2.50MM  
 THIRD ANGLE PROJECTION  
 RHTBYDGKD-2.50-XXP-4-00