

Material

Housing: PA66, UL94, V-0

Pin header: Brass, Tin plated

Electrical

Rated voltage: 150V

Rated current: 20 mA



Contact Resistance: 5A

Insulation resistance: 500MΩ/DC500V

Withstand voltage: AC1250V/1min

Mechanical

Temp. Range: -40°C ~ +105°C

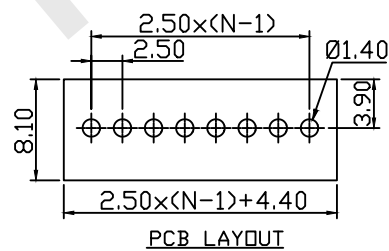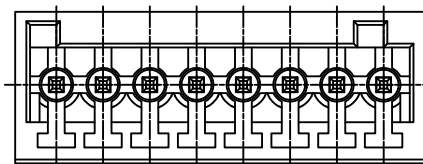

Order Information

RHTBYDV-2.50-XXP-4 00

Terminal Block

Pitch

No. of Pole

Color: 4-Green

Product Code: 00~99

 NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE: ---

DRWN BY PAN

Pluggable Terminal Block 2.50MM

0~3


3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION



RHTBYDV-2.50-XXP-4-00

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN

1

2

3

4

5

6

7

8

9