

Electrical :


Rated voltage: 300V  
 Rated current: 15A  
 Contact resistance: 20mΩ  
 Insulation resistance: 5000M Ω /1000V  
 Withstanding Voltage: AC1500V/1Min

Material

Housing: Pa66, UL94V-0  
 Screws: M2.5,steel,Zinc plated  
 Contact :Phosphor Bronze

Mechanical

Temp. Range: -40 ~+105  
 MAX Soldering: +250 for 5 Sec  
 Wire range: 28-12AWG 2.5mm<sup>2</sup>  
 Torque:0.4Nm (3.6Lb. in)  
 Strip length: 7-8 mm

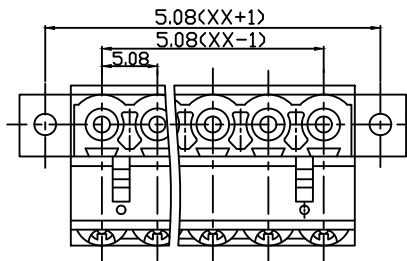

ORDER INFORMATION

Product NO.: RHTBYDKEM-5.00- XXP X X

Series No. \_\_\_\_\_ Customer Request \_\_\_\_\_

Pitch: 5 00=5.00mm 5.08=5.08mm \_\_\_\_\_ Color:1=Gray 2=Blue 3=Black

Number of Pole \_\_\_\_\_ 4=Green 5=Orange 6=Red 7=Transparent 8=Yellow 9=White

**RHTECP** NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4		SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN

Pluggable Terminal Block 5.00/5.08MM

THIRD ANGLE PROJECTION



RHTBYDKEM-5.00/5.08-XXP-4-00