
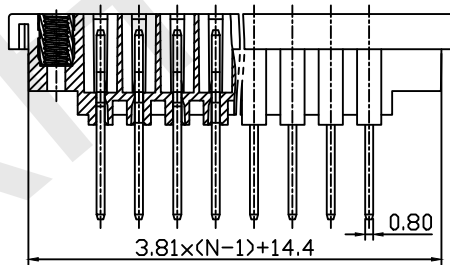
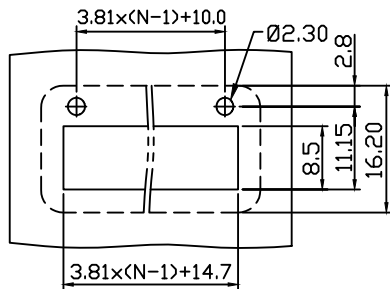


SECTION A-A

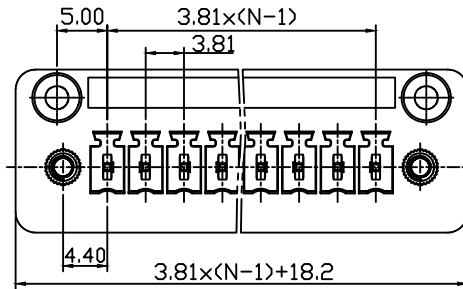

Material

Housing:PA66, UL94V-0

Pin header:Brass, Tin plated

Nut:M2.5,Brass

Electrical

Rated voltage:300V

Rated current:8A

Contact Resistance:20 mΩ

Insulation resistance:500MΩ/DC500V

Withstand voltage:AC2000V/1min

Mechanical

Temp. Range:-40℃~+105℃

Soldering:250℃5Sec. Max

Order Information

RHTBYDGM-3.81-XXP-4

Terminal Block

Pitch

No. of Pole

Color: 4-Green

 NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Pluggable Terminal Block 3.81MM

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION


±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTBYDGM-3.81-XXP-4