



SECTION A-A

Material
 Housing:PA66,UL94V-0
 Clamp:Bronze, Ni Plated
 Screws:M2 Steel,Zn plated
 Shrapnel:Brass,Ni plated

Electrical
 Rated voltage:300V
 Rated current:8A
 Contact Resistance:20 mΩ
 Insulation resistance:500MΩ/DC500V
 Withstand voltage:AC2000V/1min
 Wire Range:28~16AWG1.0mm²

Mechanical
 Temp. Range:-40℃~+ 105℃
 Torque:0.2Nm(1.7 bin)


Order Information

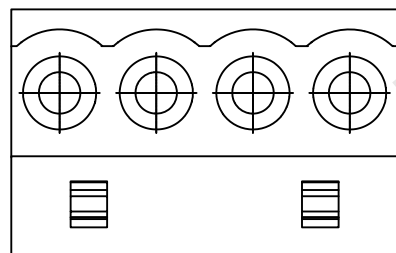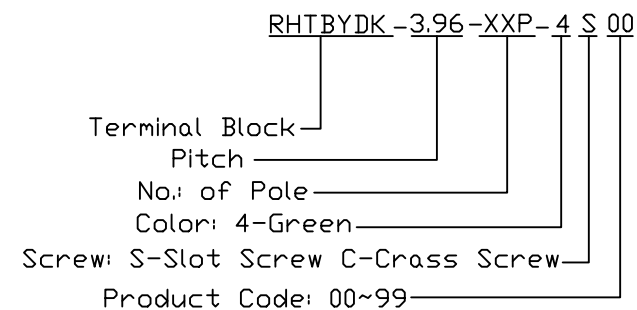

NINGBO RHT ELECTRONIC CO.,LTD

| | | | | | | |
|----------|----------------|-------|--------|---------------|------------------------|-------------|
| UNITS:mm | SHEET SIZE: A4 | | | | SCALE:--- | DRWN BY PAN |
| 0~3 | 3~18 | 18~50 | 50~120 | CHK'D BY FENG | THIRD ANGLE PROJECTION | |
| ±0.12 | ±0.15 | ±0.3 | ±0.5 | APPR BY ZHAN | RHTBYDK-3.96-XXP-4S-00 | |

Plug-in TERM BLOCK 5.08MM



RHTBYDK-3.96-XXP-4S-00