

Material
 Housing: PA66, UL94 V-0
 Cage: Brass, Ni plated
 Clamp: Phosphor bronze, Ni plated
 Screws: M3.0, Steel, Zn plated

Electrical

Rated voltage: 300V
 Rated current: 15A
 Contact Resistance: $\leq 20 \text{ m}\Omega$
 Insulation resistance: $500 \text{ M}\Omega / \text{DC} 500 \text{ V}$
 Withstand voltage: AC2000V/1min
 Wire Range: $28 \sim 14 \text{ AWG } 15 \text{ mm}^2$

Mechanical


Temp. Range: $-40^\circ\text{C} \sim +105^\circ\text{C}$
 Strip length: 7~8mm
 Torque: 0.5Nm (4.5Lbin)




Order Information

RHTBYDKA-5.00-XXP-4S00
 Terminal Block _____
 Pitch _____
 No. of Pole _____
 Color: 4-Green _____
 Screw: S-Slot Screw C-Cross Screw _____
 Product Code: 00~99 _____

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE: ---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
± 0.12	± 0.15	± 0.3	± 0.5	APPR BY ZHAN	

Pluggable Terminal Block 5.00MM
 THIRD ANGLE PROJECTION  RHTBYDKA-5.00-XXP-4S-00

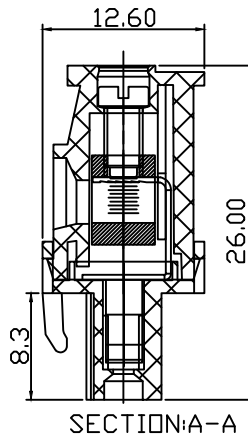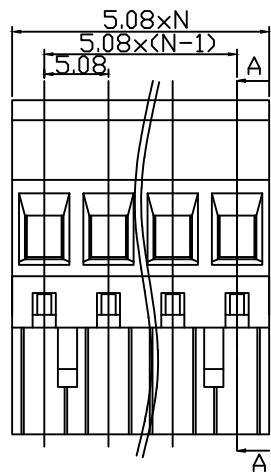

Material
 Housing: PA66, UL94 V-0
 Cage: Brass, Ni plated
 Clamp: Phosphor bronze, Ni plated
 Screws: M3.0, Steel, Zn plated

Electrical

Rated voltage: 300V
 Rated current: 15A
 Contact Resistance: $\leq 20 \text{ m}\Omega$
 Insulation resistance: $500 \text{ M}\Omega / \text{DC} 500 \text{ V}$
 Withstand voltage: AC2000V/1min
 Wire Range: $28 \sim 14 \text{ AWG } 15 \text{ mm}^2$

Mechanical


Temp. Range: $-40^\circ\text{C} \sim +105^\circ\text{C}$
 Strip length: 7~8mm
 Torque: 0.5Nm (4.5Lbin)

Order Information

RHTBYDKA-5.08-XXP-4S00
 Terminal Block _____
 Pitch _____
 No. of Pole _____
 Color: 4-Green _____
 Screw: S-Slot Screw C-Cross Screw _____
 Product Code: 00~99 _____

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE: ---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
± 0.12	± 0.15	± 0.3	± 0.5	APPR BY ZHAN	

Pluggable Terminal Block 5.08MM
 THIRD ANGLE PROJECTION  RHTBYDKA-5.08-XXP-4S-00