

SECTION A-A

Material



Housing: PA66, UL94V-0
 Pin header: Brass, Tin plated
 Wire guard: Stainless steel

Electrical

Rated voltage: 300V
 Rated current: 10A
 Wire range: 26~14AWG 1.5mm²
 Contact Resistance: 20 mΩ
 Insulation resistance: 500MΩ/DC500V
 Withstand voltage: AL2000V/1min

Mechanical

Temp. Range: -40°C~+105°C
 Soldering: 250°C±5°C for 5S
 Strip length: 5~6 mm

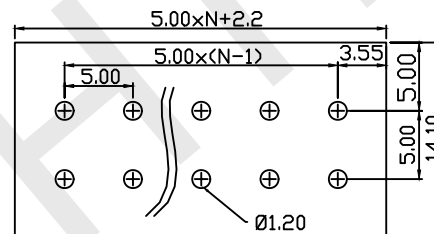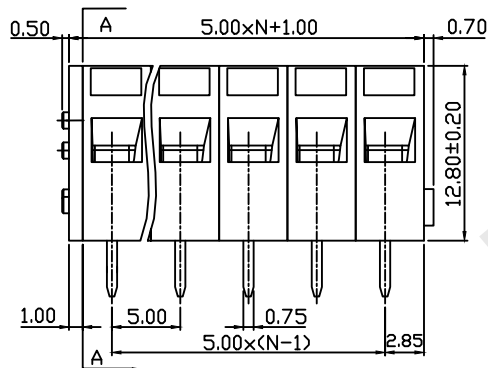

PCB LAYOUT

Order Information

RHTBY06-5.00-XXP-1 XX

Terminal Block _____
 Pitch _____
 No. of Pole _____
 Color: 1-Gray _____
 5-Orange _____
 Product Code: 00~99 _____



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

Spring Clamp Terminal Block 5.00mm	
THIRD ANGLE PROJECTION	RHTBY06-5.00-XXP-1

