



B type PCB LAYOUT



A type PCB LAYOUT



SECTION A-A

Material

Pin header: Phosphor bronze ,Tin plated
Housing:PA66,UL94V-0


Electrical

Rated voltage:300V
Rated current:7A
Wire range:26~16AWG 15mm²
Contact Resistance: 20 mΩ
Insulation resistance:500MΩ/DC500V
Withstand voltage AC2000V/1min

Mechanical

Temp. Range:-40℃~+105℃
Soldering:250℃±5℃ for 5S
Strip length:9~10 mm

Order Information

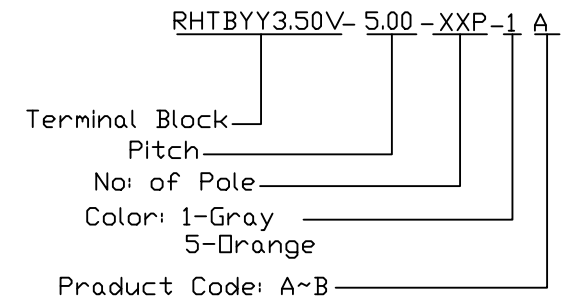

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4				SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	THIRD ANGLE PROJECTION	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN		

Spring Clamp Terminal Block 3.50mm
RHTBY3.50V-5.00-XXP-1X