

SECTION A-A

Material

Screw:M3.0,Steel, Ni Plated
 Pin header:Brass,08t, Tin Plated
 Housing:PA66.UL94 V-0,Black

Electrical



Rated voltage: 300V
 Rated current:15A
 Wire range:22~14AWG 2.5mm²
 Contact Resistance: 20 mΩ
 Insulation resistance:500MΩ/D[500V
 Withstand voltage:AC2000V/1min

Mechanical

Temp. Range:-40℃~+ 105℃
 Torque:0.5Nm(4.5Lb.in)

Order Information

RHTBY5-A-7.62-XXP-B

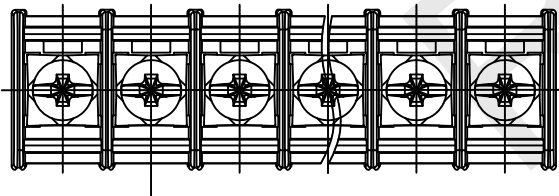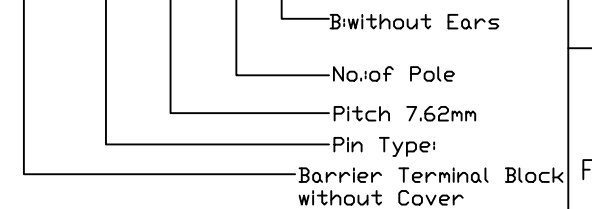

NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	THIRD ANGLE PROJECTION
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

Barrier TERM BLOCK 7.62MM

RHTBY5A-7.62-XXP-B