

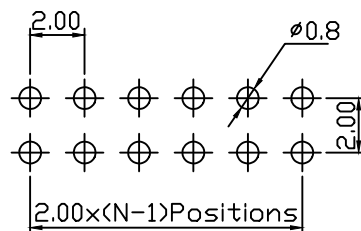
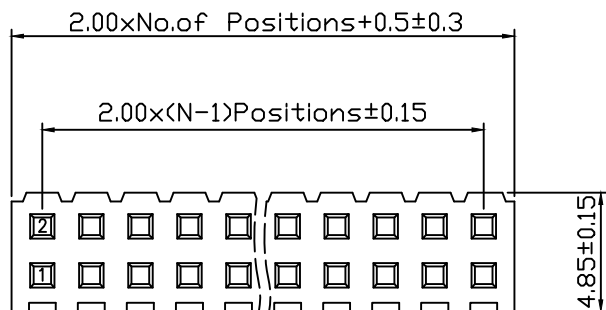


RoHS Compliance

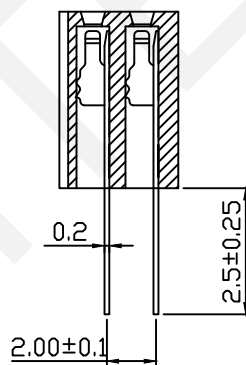

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

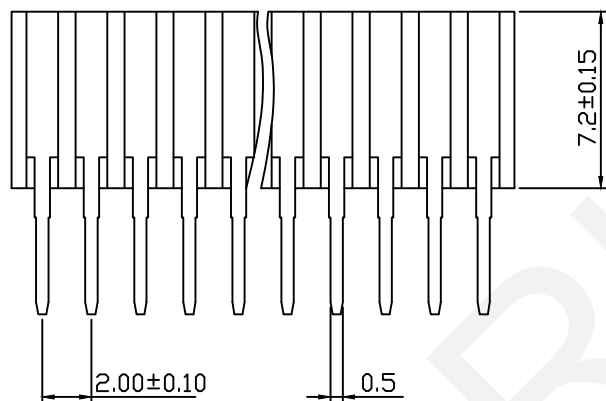

Material:
Standard:PBT/PA6T
Contact: Brass
Plating: Au Or Sn Over Ni
Insulator: Polyester, UL94V-0

Electrical Characteristics:
Rated Current: 1.5AMP
Contact Resistance: 20mΩ Max
Withstand Voltage: 500V AC/DC
Insulator Resistance: 1000MΩ Min

Mechanical
Operating Temperature: -40°C~+105°C
Max.Processing Temp: 230°C For 30-60
Seconds (260°C For 10 Seconds)



Order Information:
RHTAY08B-7.2-2-XX-S-B
Female Header Series
08B: 2.00mm
Plastics Height: 7.2mm
Per Row: Double Layer
Pin: No.of Pins (02~80)
Type: Straight Pin
Material: A=PBT B=PA6T C=LCP

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5
			CHK'D BY FENG
			APPR BY ZHAN

2.0x7.2mm Female Header Double Layer, Straight Pin, 2xN Pin	
THIRD ANGLE PROJECTION	RHTAY08B-7.2-2-XX-S-B



RoHS Compliance

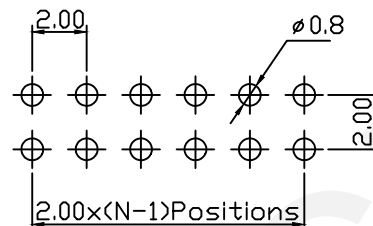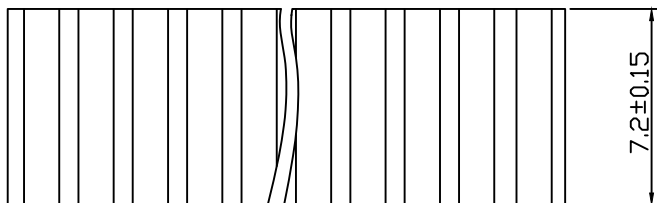

Material:
 Standard:PBT/PA6T
 Contact: Brass
 Plating: Au Or Sn Over Ni
 Insulator: Polyester, UL94V-0

Electrical Characteristics:
 Rated Current: 1.5AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulator Resistance: 1000MΩ Min

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

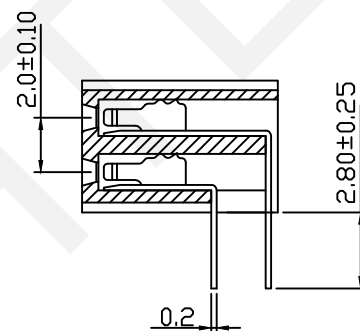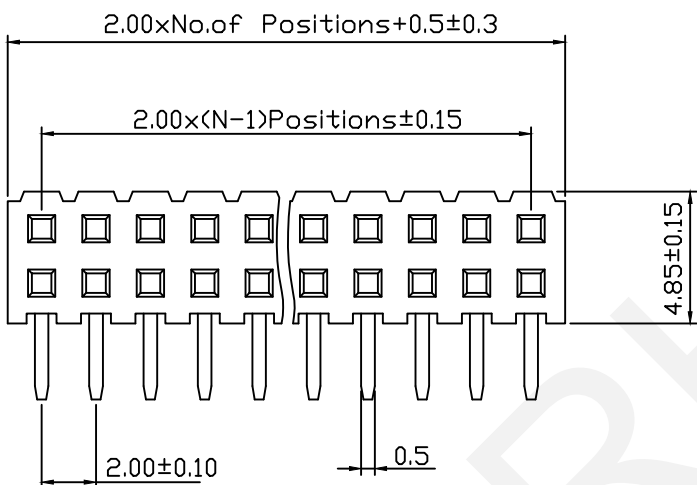

Mechanical
 Operating Temperature:-40°C~+105°C
 Max.Processing Temp:230°C For 30-60
 Seconds (260°C For 10 Seconds)

Order Information:

RHTAY08B-7.2-2-XX-R-B

Female Header Series
 08B:2.00mm
 Plastics Height:7.2mm
 Per Row:Double Layer
 Pin: No.of Pins (02~80)
 Type:Right Angle Pin
 Material:A=PBT B=PA6T C=LCP

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

2.0x7.2mm Female Header
 Double Layer,Right Angle Pin, 2xN Pin
 THIRD ANGLE PROJECTION
 RHTAY08B-7.2-2-XX-R-B