

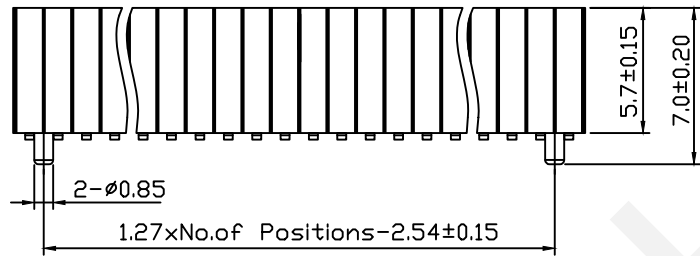
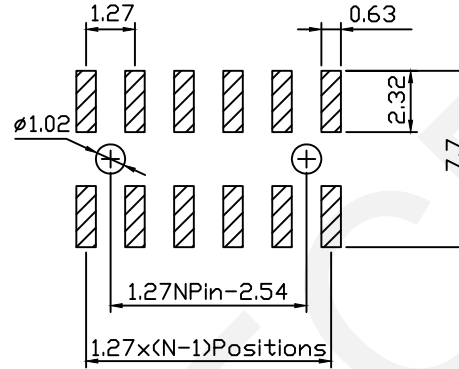


RoHS Compliance

Recommended P.C.B Layout(Top Side)

(PCB BOARD TOLERANCE±0.05)

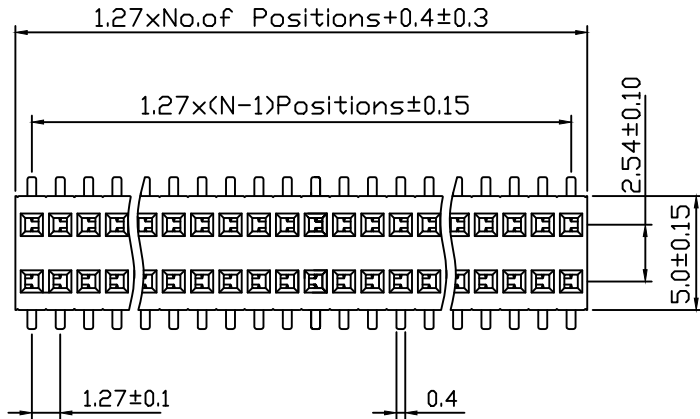

Dimension Antitheses List (mm)			
ITEM	L1	L2	Plastic Height
Standard	6.00	6.80	5.70
Nonstandard	---	---	---

Material:

Standard:PA6T/LCP

Contact: Brass

Plating: Au Or Sn Over 50u" Ni

Insulator: Polyester,UL94V-0

Electrical Characteristics:

Rated Current: 1.0AMP

Contact Resistance: 20mΩ Max

Withstand Voltage: 500V AC/DC

Insulator Resistance: 1000MΩ Min

Mechanical

Operating Temperature:-40℃~+105℃

Max.Processing Temp:230℃ For 30-60

Seconds (260℃ For 10 Seconds)

Order Information:

RHTAY08D-5.7-2-XX-T-L1xL2-B-R

Female Header

Series 08D:1.27mm

Plastics Height:5.7mm

Per Row:Double Layer

Pin:No. Of Pins(02~80)

SMT:T T=Without Post

T3=With Post

Size:L1xL2

Material:B=PA6T C=LCP

Packing:

A=Tray T=Tube M=Reel+Mylar

P=Tube+Cap R=Reel+Cap

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm SHEET SIZE: A4 SCALE:---

DRWN BY PAN

0~3 3~18 18~50 50~120

±0.12 ±0.15 ±0.3 ±0.5

CHK'D BY FENG

APPR BY ZHAN

1.27mm Female Header
Double Layer, SMT Pin, 2xN Pin

THIRD ANGLE PROJECTION



RHTAY08D-5.7-2-XX-T-L1xL2-B-R