

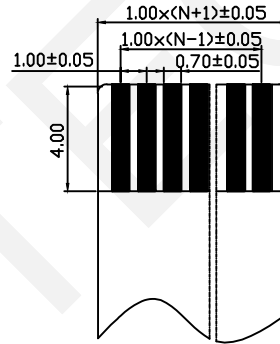



A-A

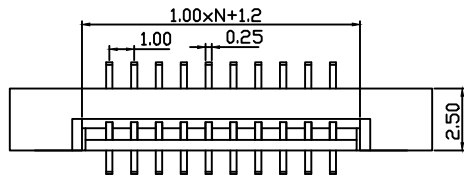

Proper Cable

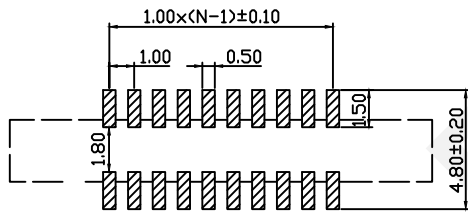

PCB Layout

Material

Housing:LCP UL94V-0

Lock:PA46,UL94V-0

Plug Spring:Phosphor Bronze,Gold/Tin

Electrical

Voltage Rating: 50V

Current Rating: 0.5A

Withstanding Voltage:500V

Insulation Resistance: 800MΩ.Min.

Contact Resistance: 20mΩ.Max.

Mechanical

Temp Range:-25℃~+85℃

Order Information

RHTAY240E-5.4-XX-T-R

Series No. ]

Height:5.4mm ]

No.of Pins ]

(02~30 Pins)

T-Vertical SMT Pin

Pack:T-Tube R-Reel ]



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

CONN FFC 1.00mm,SMD,Vertical,With ZIF

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION


±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTAY240E-5.4-XX-T-R