



Material
Housing:LCP UL94V-0

Electrical
Voltage Rating: 50 V
Current Rating: 0.4 A
Withstanding Voltage:200 V
Insulation Resistance: 500MΩ.Min.
Contact Resistance: 20mΩ.Max.

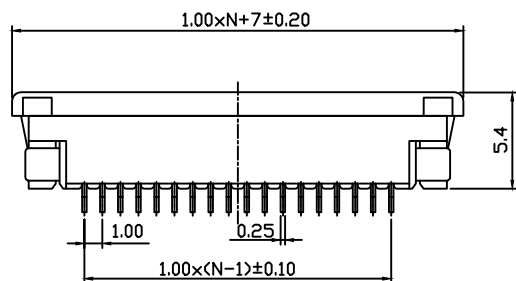

Proper Cable




Mechanical
Temp.Range:-20℃~+80℃

Order Information

RHTAY240N-2.5-XX-T-U-R

Series No. _____
Height:2.5mm _____
No.of pins _____
(04~40 Pins)
T-SMT Pin _____
U-Upper Contact _____
Pack: T-Tube R-Reel _____

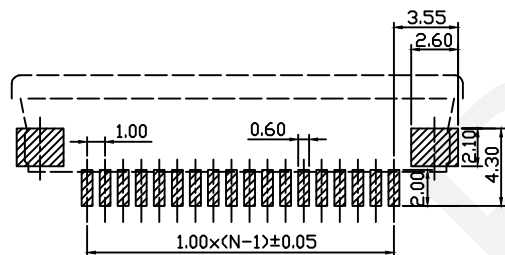

PCB Layout





NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4		SCALE:---		DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	


CONN FFC 1.00mm,SMD,
Horizontal, Upper Contact ,With ZIF



RHTAY240N-2.5-XX-T-U-R

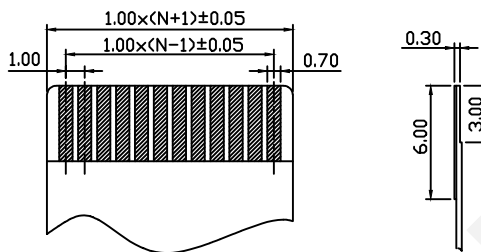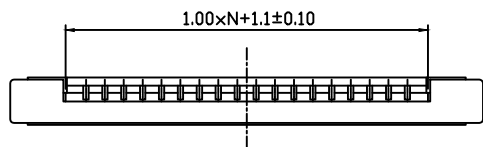


Material
 Housing:LCP UL94V-0
 Terminal:Phosphor Bronze, Tin
 Lock:LCP UL94V-0
 Soldering:Phosphor Bronze, Tin

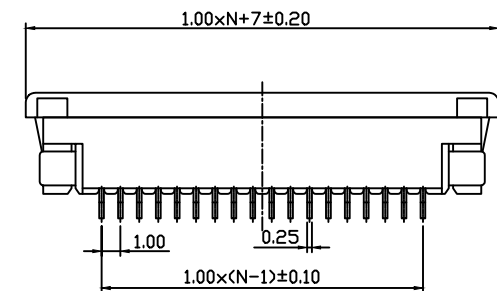


Proper Cable

Electrical
 Voltage Rating: 50 V
 Current Rating: 0.4 A
 Withstanding Voltage:200 V
 Insulation Resistance: 500MΩ.Min.
 Contact Resistance: 20mΩ.Max.



Mechanical
 Temp Range:-20℃~+80℃

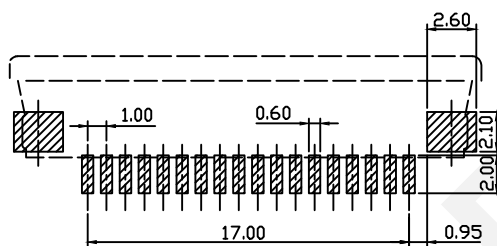

PCB Layout

Order Information
RHTAY240Q-2.5-XX-T-L-R
 Series No. |
 Height:2.5mm |
 No.of pins |
 (04~40 Pins) |
 T-SMT Pin |
 L-Lower Contact |
 Pack: T-Tube R-Reel |

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

CONN FFC 1.00mm,SMD, Horizontal, Lower Contact ,with ZIF	
THIRD ANGLE PROJECTION 	RHTAY240Q-2.5-XX-T-L-R