



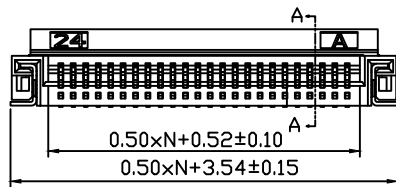


Material  
 Housing:LCP UL94V-0  
 Terminal:Phosphor Bronze ,Gold/Tin  
 Cover:LCP,UL94V-0  
 Solder:Phosphor Bronze,Tin

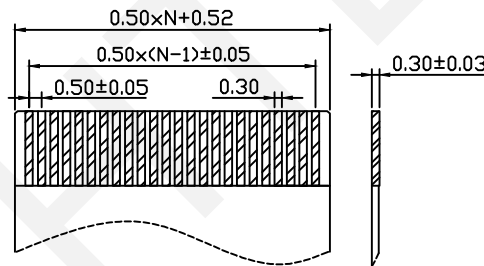


Electrical  
 Voltage Rating: 50 V  
 Insulation Resistance: 500MΩ.Min.  
 Contact Resistance: 30mΩ.Max.

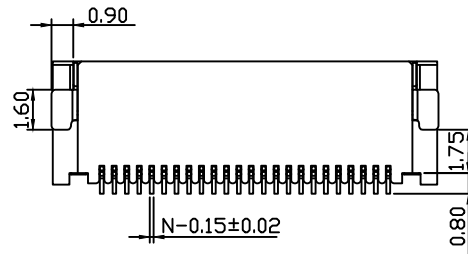

Mechanical  
 Temp Range:-25℃~+85℃

Order Information  
 RHTAY42I-2.0-XX-T-R

Series No. \_\_\_\_\_  
 Height:2.0mm \_\_\_\_\_  
 No.of Pins \_\_\_\_\_  
 (04~60 Pins)  
 T-SMT Pin \_\_\_\_\_  
 Pack:T-Tube R-Reel \_\_\_\_\_



Proper Cable



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

CONN FFC 0.50mm,SMD,Horizontal,With ZIF	
THIRD ANGLE PROJECTION	RHTAY42I-2.0-XX-T-R