





SECTION A-A



Proper Cable

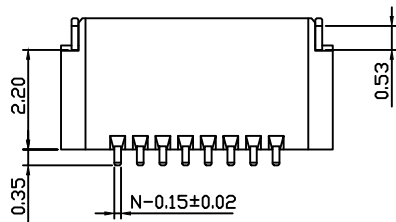

Material

Housing: LCP UL94V-0

Terminal: Phosphor Bronze, Gold/Tin

Cover: LCP, UL94V-0

Solder: Phosphor Bronze, Tin

Electrical

Voltage Rating: 50V

Insulation Resistance: 500M $\Omega$ .Min.

Contact Resistance: 30m $\Omega$ .Max.

Mechanical

Temp Range:  $-25^\circ\text{C} \sim +85^\circ\text{C}$

Order Information

RHTAY42J-1.0-XX-T-R

Series No. ]

Height: 1.0mm ]

No. of Pins ]

(<04~60 Pins)

T-SMT Pin ]

Pack: T-Tube R-Reel ]

**RHTECP** NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE: ---

DRWN BY PAN

CONN FFC 0.50mm,SMD,Horizontal, With ZIF

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION


$\pm 0.12$

$\pm 0.15$

$\pm 0.3$

$\pm 0.5$

APPR BY ZHAN



RHTAY42J-1.0-XX-T-R

1

2

3

4

5

6

7

8

9