

SECTION A-A

Material

Housing:LCP UL94V-0

Terminal:Phosphor Bronze Gold-Plated

Soldering:Phosphor Bronze Gold-Plated

Electrical



Voltage Rating: 50 V

Insulation Resistance: 500MΩ.Min.


Contact Resistance: 30mΩ.Max.

Mechanical

Temp Range:-25℃~+85℃

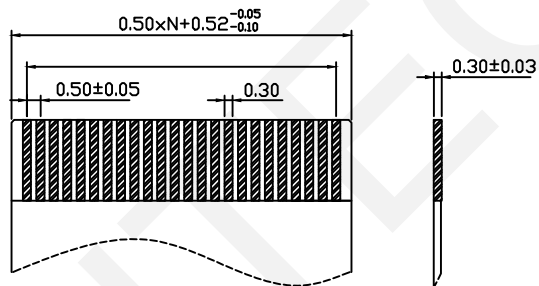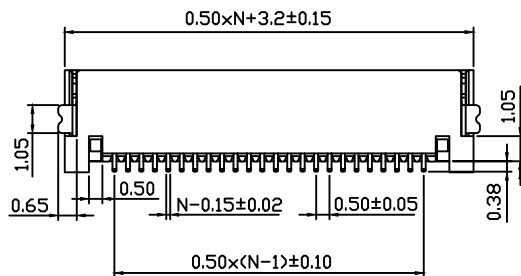

Recommended FPC Dimension

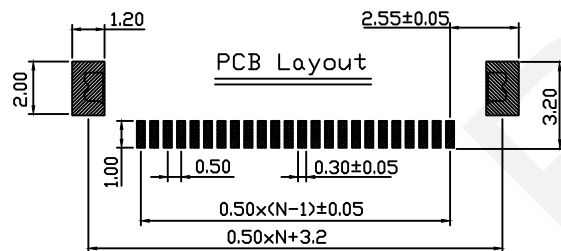

Order Information

RHTAY42X-1.2-XX-T-L-R

Series No. ↓

Height:1.2mm ↓

No.of Pins ↓

(04~60 Pins) ↓

T-SMT Pin ↓

L-Lower Contact ↓

Pack: T-Tube R-Reel ↓

**RHTECP** NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

CONN FFC 0.50mm,SMD,  
Horizontal, Lower Contact ,With ZIF

THIRD ANGLE PROJECTION

RHTAY42X-1.2-XX-T-L-R