

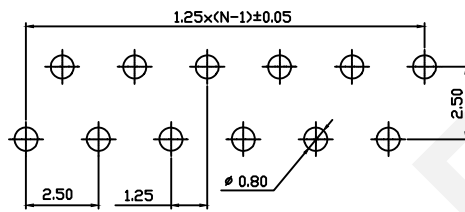



Proper Cable

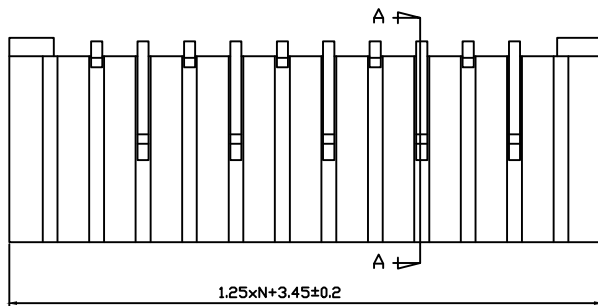

PCB Layout

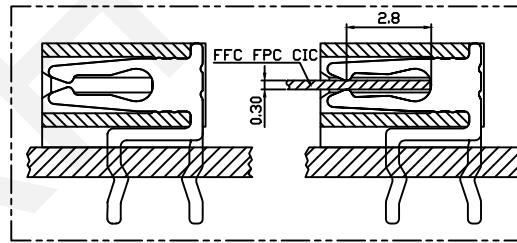

Material

Housing: LCP UL94V-0

Contact: Phosphor Bronze, Tin Plated

Electrical

Voltage Rating: 50 V

Current Rating: 0.5 A

Withstanding Voltage: 250 V

Insulation Resistance: 50M Ω .Min.

Contact Resistance: 20m Ω .Max.

Mechanical

Temp Range: -25 $^{\circ}$ C~+85 $^{\circ}$ C

Order Information

RHTAY20E-XX-R-P

Series No. ↓

No. of Pins ↓

(04~33 Pins)

R-Right Angle Pin ↓

P-Positive Needle ↓



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE: ---

DRWN BY PAN

CONN FFC 1.25mm,THR 90°, Positive Needle

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION


±0.12

±0.15


±0.3

±0.5

APPR BY ZHAN



RHTAY20E-XX-R-P

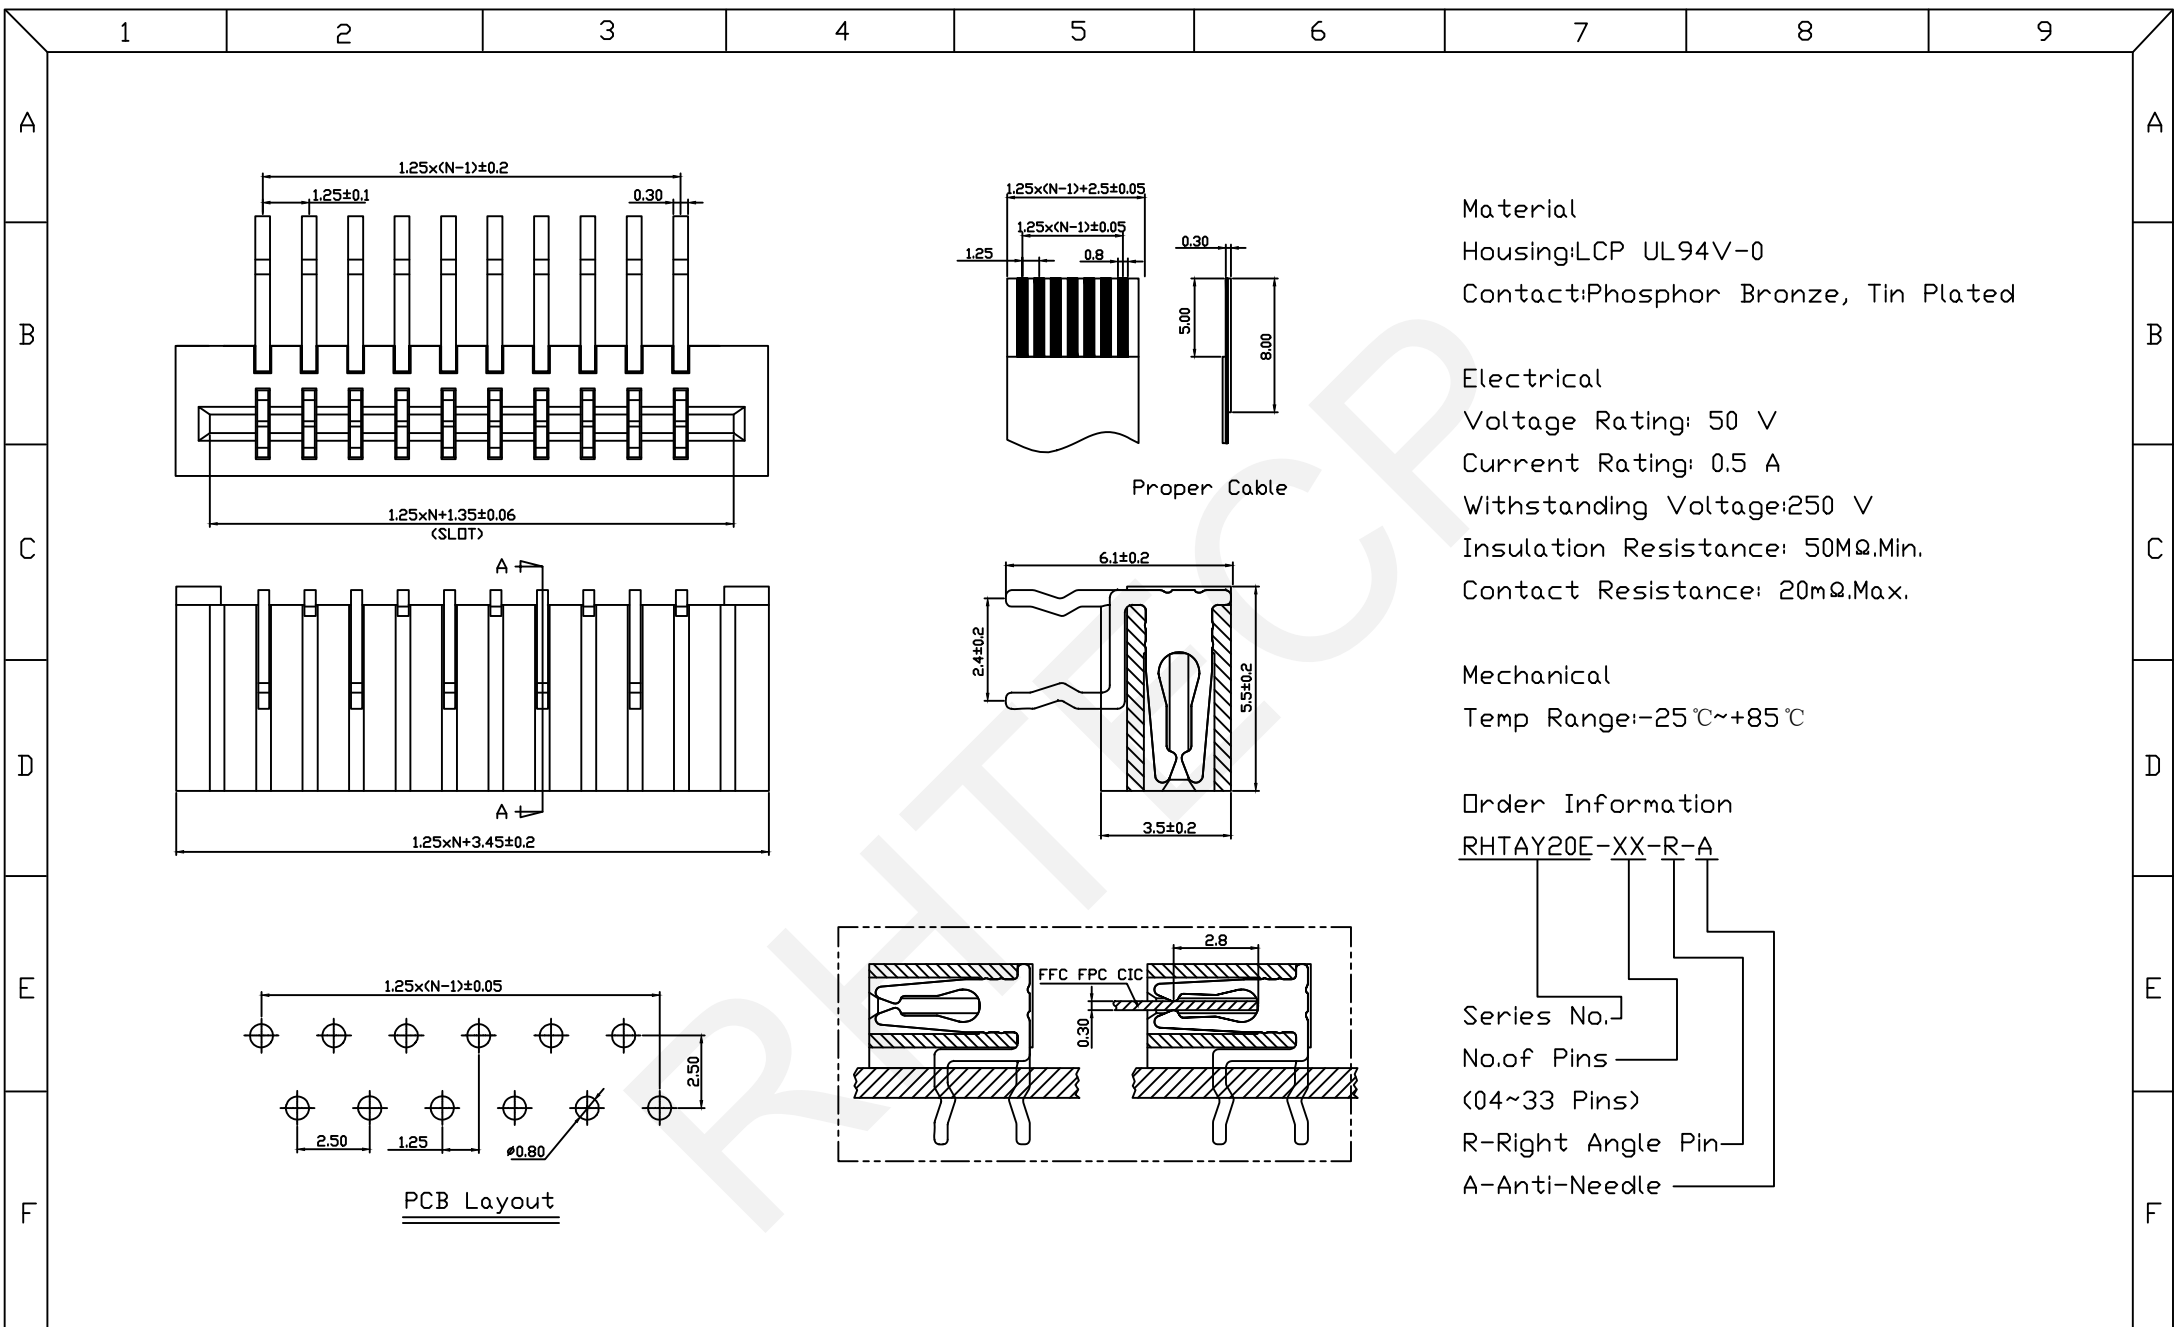

Material
Housing:LCP UL94V-0
Contact:Phosphor Bronze, Tin Plated

Electrical
Voltage Rating: 50 V
Current Rating: 0.5 A
Withstanding Voltage:250 V
Insulation Resistance: 50MΩ.Min.
Contact Resistance: 20mΩ.Max.

Mechanical
Temp Range:-25℃~+85℃


Order Information
RHTAY20E-XX-R-A
Series No. |
No.of Pins |
(04~33 Pins)
R-Right Angle Pin |
A-Anti-Needle |



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

CONN FFC 1.25mm,THR 90°,Anti-Needle



RHTAY20E-XX-R-A