


A-A



Applied Flat Line

Material

Housing:Thermoplastic UL94V-0

Terminal:Phosphor Bronze Tin-plated

Fitting Nial:Phosphor Bronze Tin-plated

Electrical

Voltage Rating: 48V

Current Rating: 0.4A

Insulation Resistance: 500mΩ.Min.

Confact Resistance: 20 mΩ.max.

Mechanical

Temp.Range:-25℃~+85℃

Order Information

RHTAY42K-3.7-XX-T-P-R

Series No.]

Height:3.7mm



No.of Pins

(06~60 Pins)

T-SMT Pin

P-Positive Needle

Pack: T-Tube R-Reel

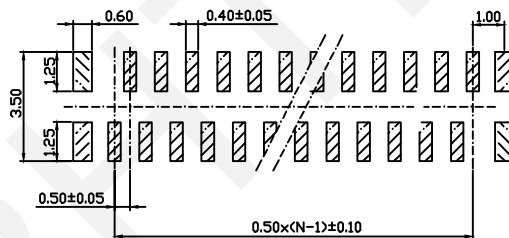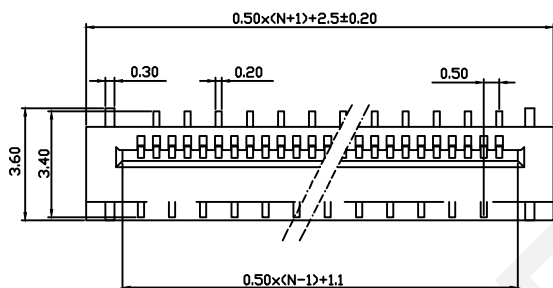

PCB Layout

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

CONN FFC 0.50mm,SMD,Vertical

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION


±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTAY42K-3.7-XX-T-P-R

1

2

3

4





5

6

7

8

9

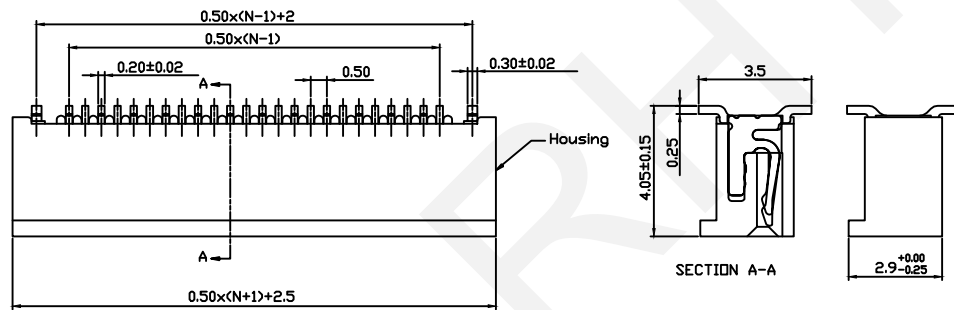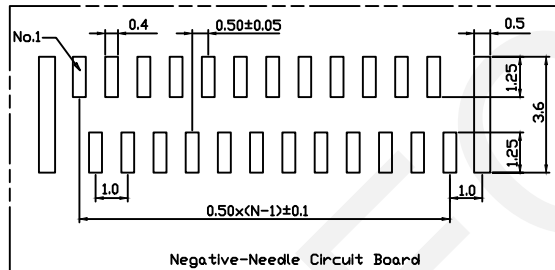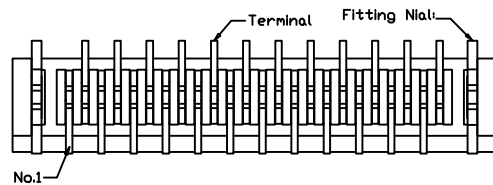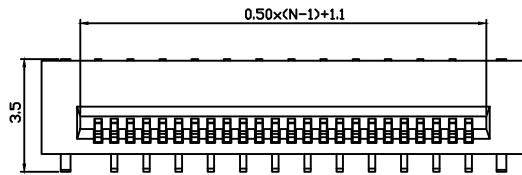

Material

Housing:Thermoplastic UL94V-0

Terminal:Phosphor Bronze Tin-plated

Fitting Nial:Phosphor Bronze Tin-plated

Electrical

Voltage Rating: 48V

Insulation Resistance: 500mΩ.Min.

Contact Resistance: 20 mΩ.max.

Mechanical

Temp.Range:-25℃~+85℃

Order Information

RHTAY42K-3.7-XXP-T-A-R

Series No.]

Height:3.7mm

No.of Pins

(06~50 Pins)

T-SMT Pin

A-Anti-Needle

P-Positive Needle


Pack: T-Tube R-Reel

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

0.50mm Pitch FFC/FPC Connector

THIRD ANGLE PROJECTION



RHTAY42K-3.7-XXP-T-A-R