
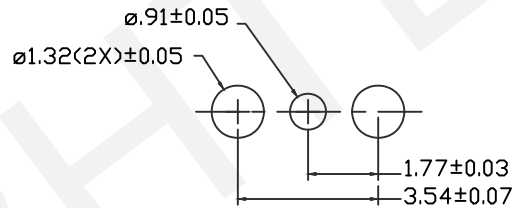


MOUNTING HOLE



PCB MOUNTING HOLE

Electrical Specifications

Impedance: 50Ω
 Frequency Range: DC-6 GHz
 VSWR: 1.15 max. @ DC-4 GHz
 1.40 max. @ 4-6 GHz
 RF-Leakage: 60 dB minimum @ 1 GHz (flexible cable)
 70 dB minimum @ 1 GHz (semi-rigid cable)
 Voltage Rating (at sea level): 170 Vrms Max.
 Contact Resistance: center contact: 10 mΩ Max
 outer contact: 5 mΩ Max
 Insulation Resistance: 1,000 MΩ Min.
 Dielectric Withstanding Voltage: 500 Vrms (at sea level)

Mechanical

Mating: Snap-on coupling
 Contact Captivation: 2.3 lbs
 Engagement Force: 3.4 lbs (15N) Max.
 Disengagement Force: 1.4 lbs (6N) Min.
 Durability (matings): 500 cycles Min.
 Temperature Range: -55°C to +155°C

Material


Body and Outer Contacts: Brass, nickel or gold plated
 Male Contact: Brass, gold plated
 Female Contact: Beryllium copper or phosphor bronze, gold plated
 Crimp Ferrule: Copper or brass, nickel plated
 Insulator: LCP, PTFE Or PFA

 NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4		SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN

MMCX Connector Series

THIRD ANGLE PROJECTION



RHTAYMCX002