
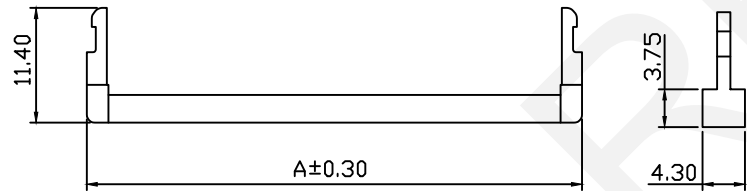

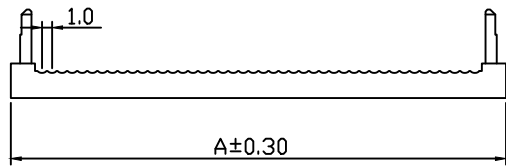

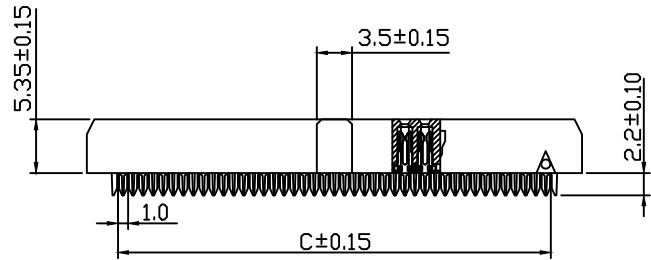


RoHS Compliance

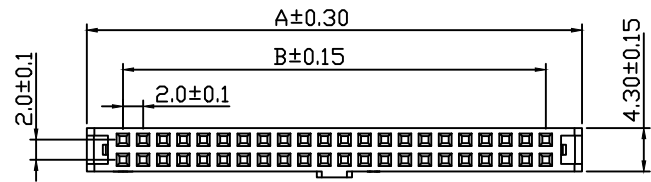

Strain Relife

Pin	Dimension mm		
	A	B	C
06	11.20	4.00	5.00
08	13.20	6.00	7.00
10	15.20	8.00	9.00
12	17.20	10.00	11.00
14	19.20	12.00	13.00
16	21.20	14.00	15.00
18	23.20	16.00	17.00
20	25.20	18.00	19.00
24	29.20	22.00	23.00
26	31.20	24.00	25.00
30	35.20	28.00	29.00
34	39.20	32.00	33.00
40	45.20	38.00	39.00
44	49.20	42.00	43.00
50	55.20	48.00	49.00
60	65.20	58.00	59.00
64	59.20	62.00	63.00
68	73.20	66.00	67.00
80	85.20	78.00	79.00

Material:
Housing: PBT,UL94V-0
Contact: Brass
Plating: Au Or Sn Over Ni

Electrical Characteristics:
Current Rating : 1.0AMP
Withstand Voltage: 500V AC
Insulator Resistance: 1000MΩ ohm Min
Contact Resistance: 20MΩ ohm Max
Operating Temperature:-40°C~+105°C
Max.Processing Temp:180°C For 30-60
Seconds (200°C For 10 Seconds)

Order Information:

RHTAY04B-XX-B

IDC Connectors

2.00mm Pitch

XX-No.of 06~100pin

Color:


B-Black G-Gray L-Blue

 NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5
CHK'D BY FENG		APPR BY ZHAN	

2.00mm Pitch IDC Socket Connector

THIRD ANGLE PROJECTION



RHTAY04B-XX-B