

Material
 Housing: LCP UL94V-0
 Contact: Phosphor Bronze, Tin Plated

Electrical
 Voltage Rating: 50 V
 Current Rating: 0.5 A
 Withstand Voltage: 500 V
 Insulation Resistance: 500MΩ.Min.
 Contact Resistance: 30mΩ.Max.

Mechanical
 Temp Range: -25°C~+85°C

Order Information
 RHTAY40C-XX-PT-R


Series No. []
 No. of Pins []
 (04~35 Pins)
 RT-SMD, Horizontal
 Packing: T-Tube R-Reel











NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

CONN FFC 1.00mm,SMD,Horizontal	
THIRD ANGLE PROJECTION	RHTAY40C-XX-PT-R



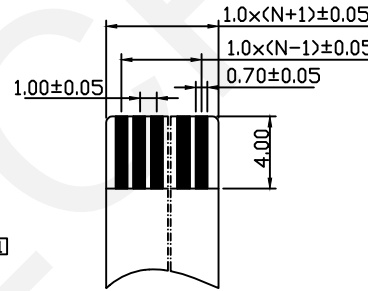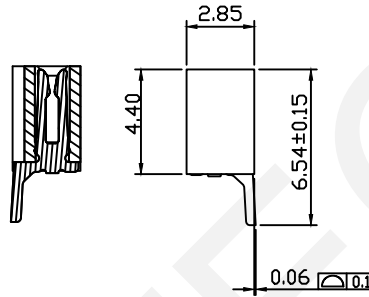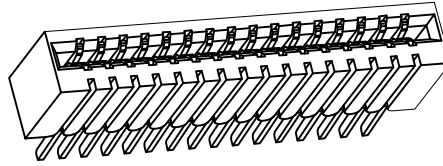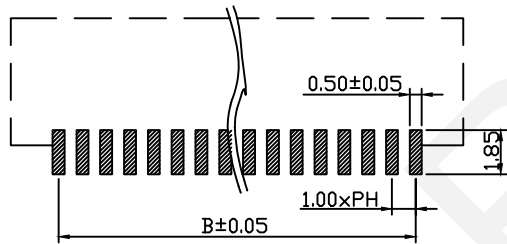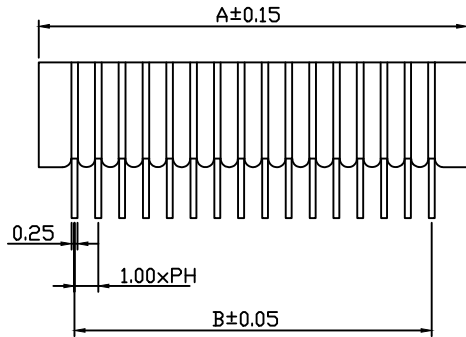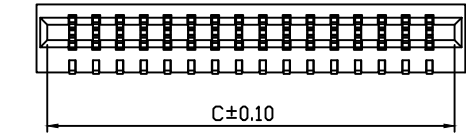

Material Housing: LCP UL94V-0
 Contact: Phosphor Bronze, Gold/Tin
 Electrical
 Voltage Rating: 50 V
 Current Rating: 0.5 A
 Withstand Voltage: 500 V
 Insulation Resistance: 500MΩ.Min.
 Contact Resistance: 20mΩ.Max.
 Temp Range: -20℃~+85℃


Pin	A	B	C
04	6.00	3.00	5.10
05	7.00	4.00	6.10
06	8.00	5.00	7.10
07	9.00	6.00	8.10
08	10.00	7.00	9.10
09	11.00	8.00	10.10
10	12.00	9.00	11.10
11	13.00	10.00	12.10
12	14.00	11.00	13.10
13	15.00	12.00	14.10
14	16.00	13.00	15.10
15	17.00	14.00	16.10
16	18.00	15.00	17.10
17	19.00	16.00	18.10
18	20.00	17.00	19.10
19	21.00	18.00	20.10
20	22.00	19.00	21.10
21	23.00	20.00	22.10
22	24.00	21.00	23.10
23	25.00	22.00	24.10
24	26.00	23.00	25.10
25	27.00	24.00	26.10
26	28.00	25.00	27.10
27	29.00	26.00	28.10
28	30.00	27.00	29.10
29	31.00	28.00	30.10
30	32.00	29.00	31.10
31	33.00	30.00	32.10
32	34.00	31.00	33.10
33	35.00	32.00	34.10
34	36.00	33.00	35.10
35	37.00	34.00	36.10

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

CONN FFC 1.00mm,SMD,Horizontal Type

THIRD ANGLE PROJECTION



RHTAY40I-2.85-24-R