


RoHS Compliance

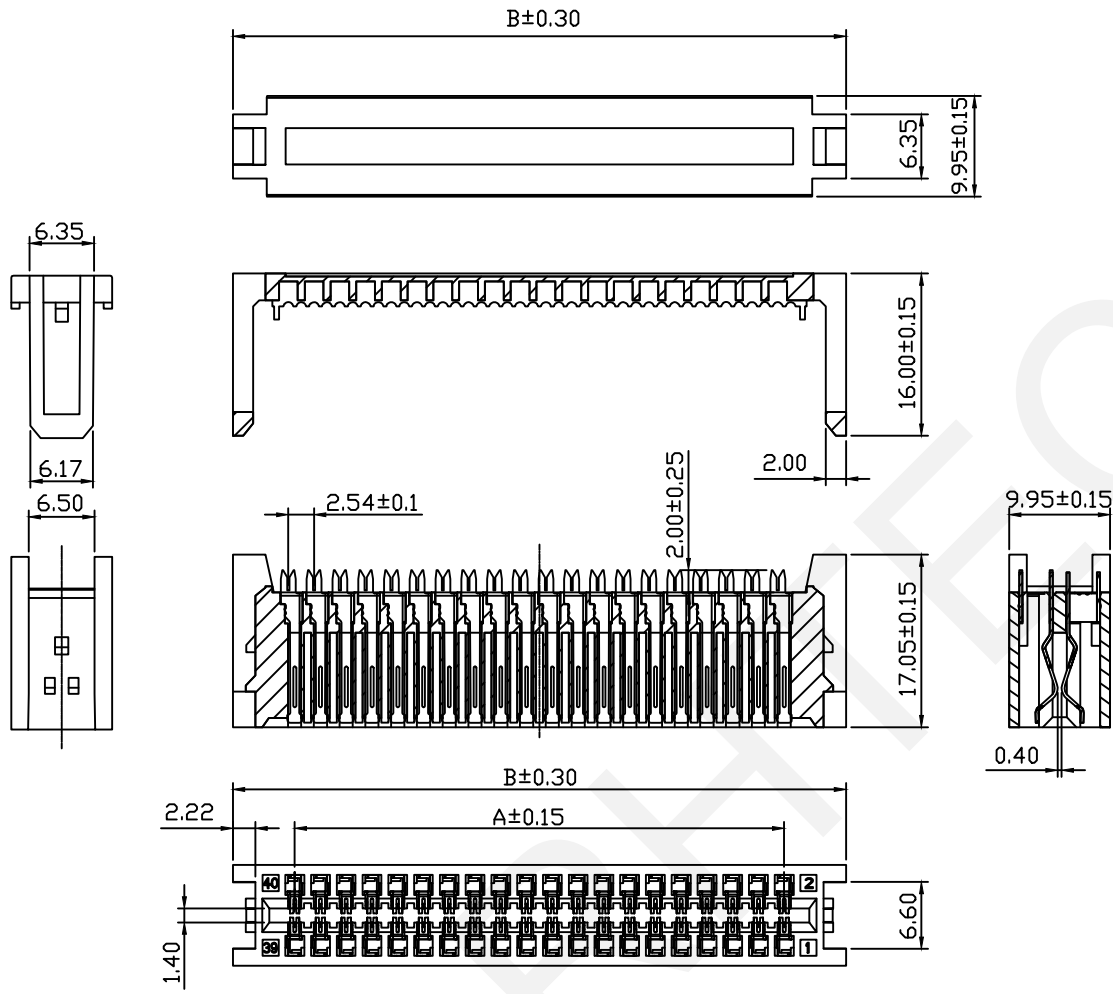

Material:  
Housing: 30% Glass filled PBT UL94V-0  
Contacts: Phosphor Bronze  
Plating: Au Or Sn Over 50u" Nickel


Electrical Characteristics:  
Current Rating : 3.0AMP  
Voltage Rating : 250V AC,DC  
Withstand Voltage: 500V AC  
Insulator Resistance: 1000MΩ ohm Min  
Contact Resistance: 20MΩ ohm Max  
Operating Temperature:  $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$   
Max. Processing Temp:  $180^{\circ}\text{C}$  For 30-60 Seconds ( $200^{\circ}\text{C}$  For 10 Seconds)

Order Information:  
RHTAY04CE-XX  
IDC Connectors  
2.54mm Pitch  
XX-No. of 10~64pin

| Pin | Dimension mm |       |
|-----|--------------|-------|
|     | A            | B     |
| 10  | 10.16        | 22.36 |
| 14  | 15.24        | 27.44 |
| 16  | 17.78        | 29.98 |
| 20  | 22.86        | 35.06 |
| 26  | 30.48        | 42.68 |
| 34  | 40.64        | 52.84 |
| 40  | 48.26        | 60.46 |

**RHTECP** NINGBO RHT ELECTRONIC CO.,LTD

|               |                |              |             |
|---------------|----------------|--------------|-------------|
| UNITS:mm      | SHEET SIZE: A4 | SCALE:---    | DRWN BY PAN |
| 0~3           | 3~18           | 18~50        | 50~120      |
| ±0.12         | ±0.15          | ±0.3         | ±0.5        |
| CHK'D BY FENG |                | APPR BY ZHAN |             |

2.54mm Pitch EDGE Card IDC Connector  
THIRD ANGLE PROJECTION  
  
RHTAY04CE-XX