


RoHS Compliance

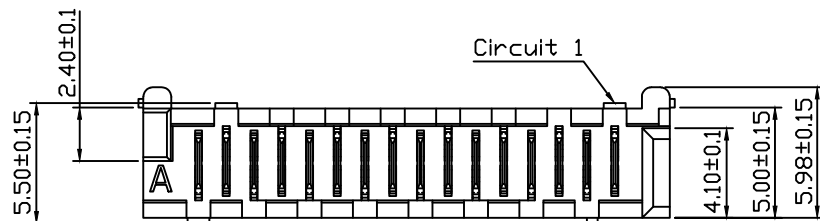

Material:

Housing: PA6T,UL94V-0,Black

Contacts: Brass

Plating: Sn Over 50u" Nickel

Electrical Characteristics:

Current Rating : 1.2AMP




Voltage Rating : 250V AC

Insulator Resistance: 1000M ohm min.

Withstand Voltage: 500V AC/Minute

Contact Resistance: 20M ohm Max

Operating Temperature:-40°C~+105°C

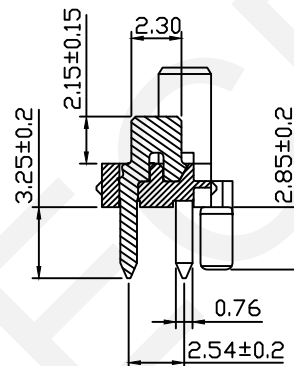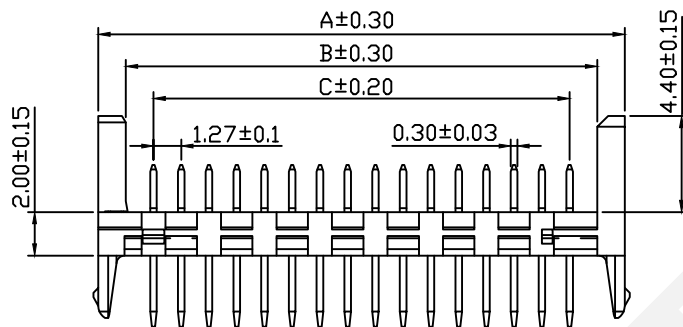

Order Information:


RHTAYICS-XX

IDC Connectors

1.27mm Pitch

XX-No.of 04~26pin

Pin	Dimension mm			
	A	B	C	D
04	8.86	6.35	3.81	7.41
06	11.40	8.89	6.35	9.95
08	13.94	11.43	8.89	12.49
10	16.48	13.94	11.43	15.03
12	19.02	16.51	13.97	17.57
14	21.56	19.05	16.51	20.11
16	24.10	21.59	19.05	22.65
18	26.64	24.13	21.59	25.19
20	29.18	26.67	24.13	27.73
22	31.72	29.21	26.67	30.27
24	34.26	31.75	29.21	32.81
26	36.80	34.29	31.75	35.35

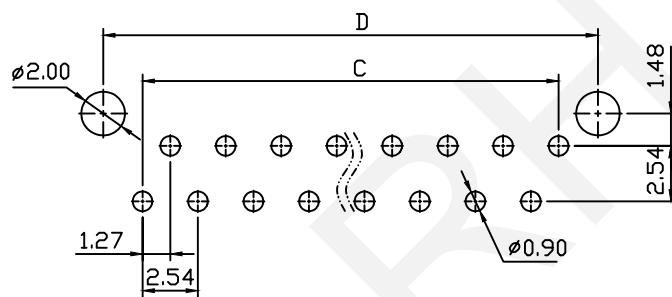


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4				SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	1.27mm Pitch MOLEX 90325 Picoflex Ribbon Cable Connectors	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	THIRD ANGLE PROJECTION	RHTAYICS-XX



RHTAYICS-XX