



QUARTZ CRYSTAL RESONATOR

PARAMETERS



RHTHY01111

RHTHY01111 Needle pre-insulation terminal Series

Maximum Electrical Rating: 75°C 600 Volts Max.

Insulation Material: Vinyl

Terminal Material: Brass

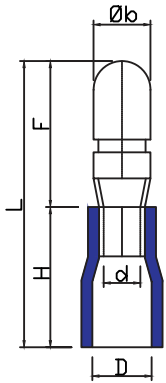

Item No.	Section of lead	Thickness of material mm	Dimension						COLOR
			b	F	D	d	H	L	
			mm	mm	mm	mm	mm	mm	
RHTHY01111-MPD1.25-156	0.5~1.5mm <sup>2</sup> (22~16A.W.G.) I Max=10A	0.4	4.0	11.0	3.5	3.0	10.0	21.0	RED
RHTHY01111-MPD2-156	1.5~2.5mm <sup>2</sup> (16~14A.W.G.) I Max=10A	0.4	4.0	11.0	4.3	3.2	10.0	21.0	BLUE
RHTHY01111-MPD2-159		0.4	5.0	11.0	4.3	3.0	10.0	21.0	
RHTHY01111-MPD5.5-195	4~6mm <sup>2</sup> (12~10A.W.G.) I Max=24A	0.4	5.0	11.0	5.8	4.7	13.0	25.0	YELLOW

ORDER INFORMATION

RHTHY 01111 -MPD1.25-156  
 RHTHY 01111 -MPD1.25-156  
 ————— Item NO.  
 ————— Bullet father pre-insulation terminal Series  
 ————— Part Number