



QUARTZ CRYSTAL RESONATOR

PARAMETERS



RHTHY01113

RHTHY01113 Needle pre-insulation terminal Series

Maximum Electrical Rating: 75°C 300 Volts Max.

Insulation Material: VINYL

Terminal Material: COPPER

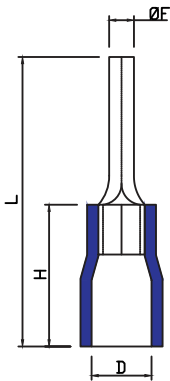

Item No.	Section of load	Dimension				COLOR
		F	L	H	D	
		mm	mm	mm	mm	
RHTHY01113-PTV1.25-9	0.5~1.5mm ² (22~16.A.W.G.) I Max=19A	1.9	19	10	4.3	RED
RHTHY01113-PTV1.25-10		1.9	20.0			
RHTHY01113-PTV1.25-12		1.9	22.0			
RHTHY01113-PTV1.25-13		1.9	23.0			
RHTHY01113-PTV2-9	1.5~2.5mm ² (16~14.A.W.G.) I Max=27A	1.9	19	10	4.9	BLUE
RHTHY01113-PTV2-10		1.9	20.0			
RHTHY01113-PTV2-12		1.9	22.0			
RHTHY01113-PTV2-13		1.9	23.0			
RHTHY01113-PTV5.5-13	4~6mm ² (12~10.A.W.G.) I Max=19A	2.8	26	12.5	6.7	YELLOW

ORDER INFORMATION

RHTHY01113 PTV1.25-9

_____ Item NO.
 _____ Female pre-insulating Terminals Series
 _____ Part Number