

Specification:

Frequency: 824~960/1710~2170MHz

Gain : 2dBi

Vswr : 1.5 Max.

Impedance : 50 Ω


Polarization : Vertical

Radiation : OMNIDIRECTIONAL

Connector : SMA-J

Lightning protection: DC Grounding

Operating Temperature : -30°C to + 70°C

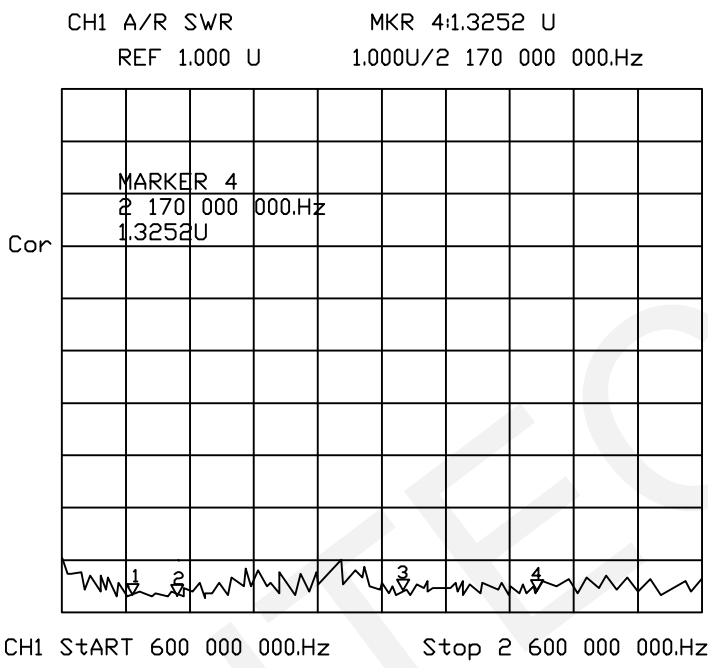

ITEM	L±3mm
3GR102-056	56
3GR102-078	78

NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

3G Antenna

THIRD ANGLE PROJECTION

RHTAYGR102