

RoHS Compliance

Material:

Housing :PBT Glass Fiber,UL94V-0

Contacts: Brass

Plating: Sn Over Ni

Electrical Characteristics:

Current Rating : 1.0AMP

Contact Resistance: 20MΩ ohm Max

Insulator Resistance: 1000MΩ ohm Min

Withstand Voltage: 500V AC

Operating Temperature:-40°C~+105°C

Order Information:

RHTAY04EN-XX-R-□-□

Pitch:2.54mm

XX-No.of 04~26pin

Color:R-Red B-Black


Material:

NONE=PBT E=PA46

Packing:


NONE=Tray T=Tube

Poles	DIM.A	DIM.B	Qty/Tube
04	8.45	2.54	68
06	10.99	5.08	52
08	13.53	7.62	42
10	16.07	10.16	36
12	18.61	12.70	31
14	21.15	15.24	27
16	23.69	17.78	24
18	26.23	20.32	22
20	28.77	22.86	20
22	31.31	25.40	18
24	33.85	27.94	17
26	36.39	30.48	16

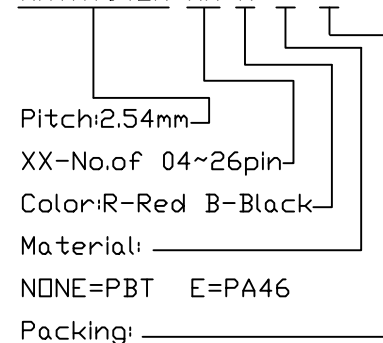


Micro Match Connector

THIRD ANGLE PROJECTION



RHTAY04EN-XX-R-□-□

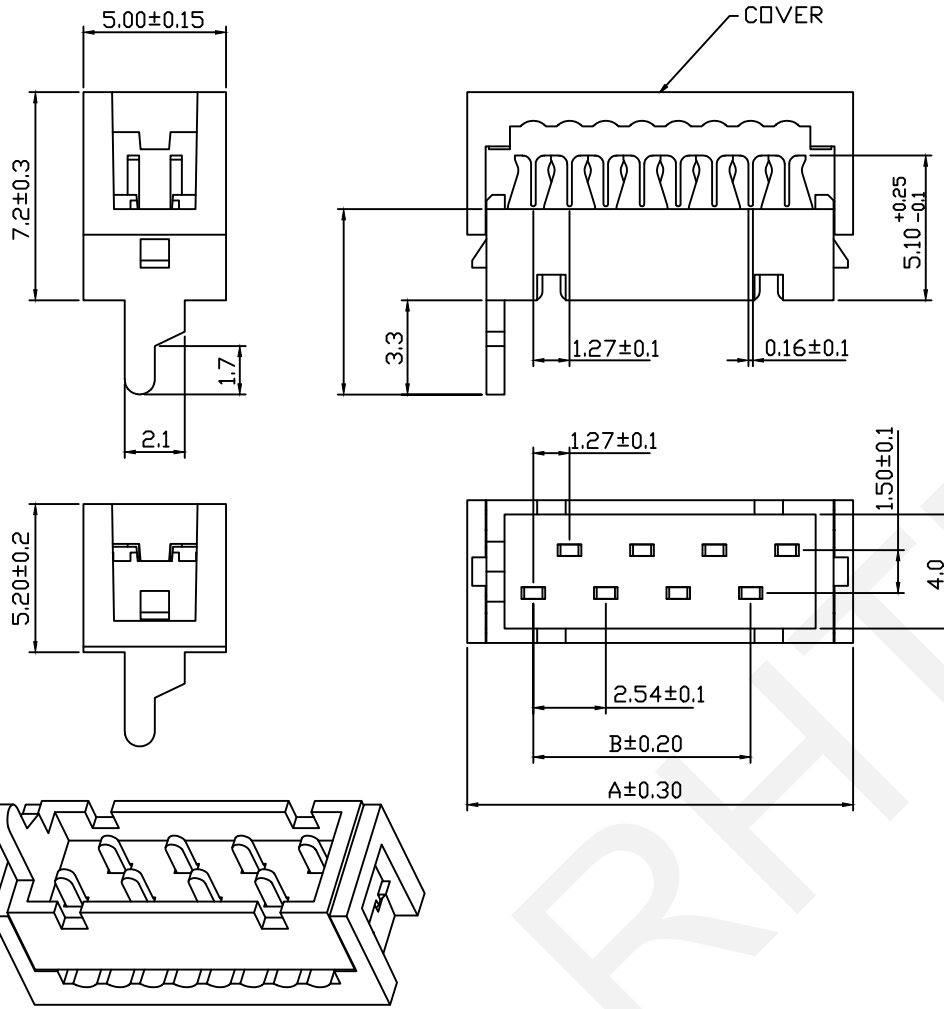

UNITS:mm	SHEET SIZE: A4				SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG		
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN		

 NINGBO RHT ELECTRONIC CO.,LTD