



RoHS Compliance

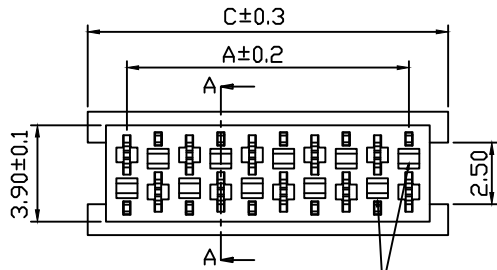

REFERENCE MATING INTERFACE PATTERN:  
1.27 STAGGERED PITCHx15 ROW-DISTANCE

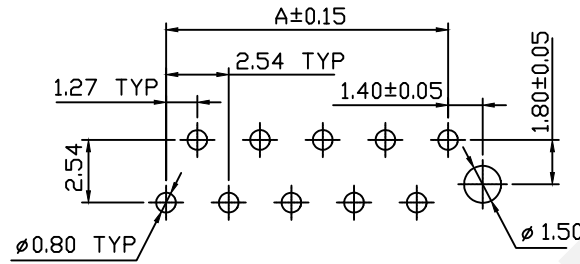

Recommended P.C.B Layout

Material:

Housing: PBT,Glass Fiber,UL94V-0

Contacts: Phosphor Bronze

Plating: Sn Over Ni

Electrical Characteristics:



Current Rating : 1.0AMP

Contact Resistance: 20MΩ ohm Max


Insulator Resistance: 1000MΩ ohm Min

Withstand Voltage: 500V AC

Operating Temperature:-40°C~+105°C

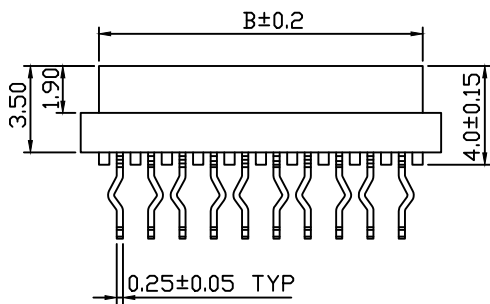

SECTION A-A

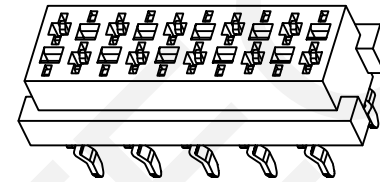

Poles	DIM.A	DIM.B	DIM.C	Qty/Tube
04	3.81	5.50	6.99	82
06	6.35	8.04	9.53	60
08	8.89	10.58	12.07	48
10	11.43	13.12	14.61	39
12	13.97	15.66	17.15	33
14	16.51	18.20	19.69	29
16	19.05	20.74	22.23	26
18	21.59	23.28	24.77	23
20	24.13	25.82	27.31	21
22	26.67	28.36	29.85	19
24	29.21	30.90	32.39	17
26	31.75	33.44	34.93	16

Order Information:

RHTAY04FV-XX-R-□



Pitch:2.54mm

XX-No.of 04~26pin

Color:R-Red B-Black

Material:

A=PBT D=PA9T E=PA46

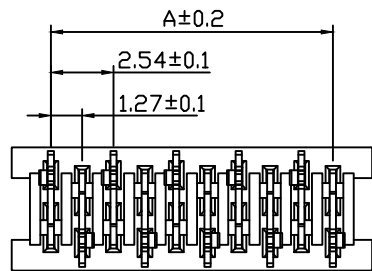


0.60±0.1 TYP

**RHTECP** NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5
			CHK'D BY FENG
			APPR BY ZHAN

Micro Match Connector Male SMD Type

THIRD ANGLE PROJECTION



RHTAY04FV-XX-R-□