

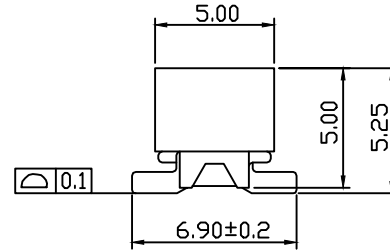
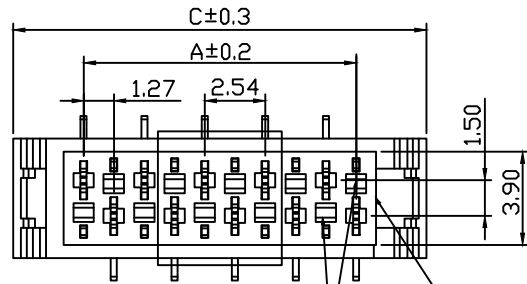
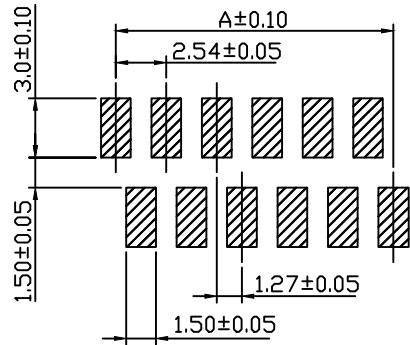


RoHS Compliance

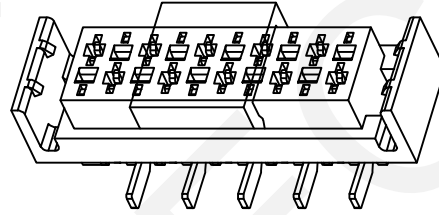

REFERENCE MATING INTERFACE PATTERN:
1.27 STAGGERED PITCHx15 ROW-DISTANCE

POLARISATION
SOLT

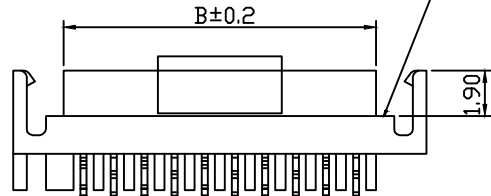

Recommended P.C.B Layout

Material:
Housing: PA46/PA9T UL94V-0
Contacts: Phosphor Bronze
Plating: Sn Over 50u" Nickel

Electrical Characteristics:
Current Rating : 1.0AMP
Voltage Rating: 230V AC/DC
Withstand Voltage: 500V AC/Minute
Contact Resistance: 20MΩ ohm Max
Insulator Resistance: 1000MΩ ohm Min
Operating Temperature:-40°C~+105°C

Order Information:

RHTAY04GE-XX-R-□-□




Poles	DIM.A	DIM.B	DIM.C	Qty/Tube
04	3.81	5.50	9.71	59
06	6.35	8.04	12.25	47
08	8.89	10.58	14.79	39
10	11.43	13.12	17.33	33
12	13.97	15.66	19.87	29
14	16.51	18.20	22.41	25
16	19.05	20.74	24.95	23
18	21.59	23.28	27.49	21
20	24.13	25.82	30.03	19
22	26.67	28.36	32.57	17
24	29.21	30.90	35.11	16
26	31.75	33.44	37.65	15



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5
CHK'D BY FENG		APPR BY ZHAN	

Micro Match Connector Female SMT With Ear



RHTAY04GE-XX-R-□-□