
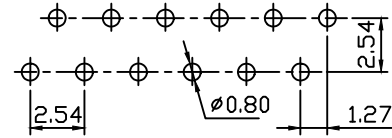



RoHS Compliance

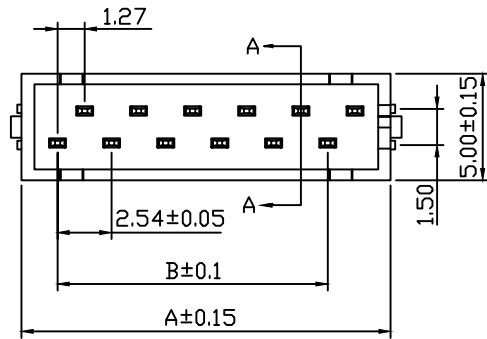

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

Material:
Housing :PBT/PA46 UL94V-0
Contacts: Brass
Plating: Sn Over Ni

Electrical Characteristics:
Current Rating : 1.0AMP
Contact Resistance: 20MΩ ohm Max
Insulator Resistance: 1000MΩ ohm Min
Withstand Voltage: 500V AC
Operating Temperature:-40°C~+105°C

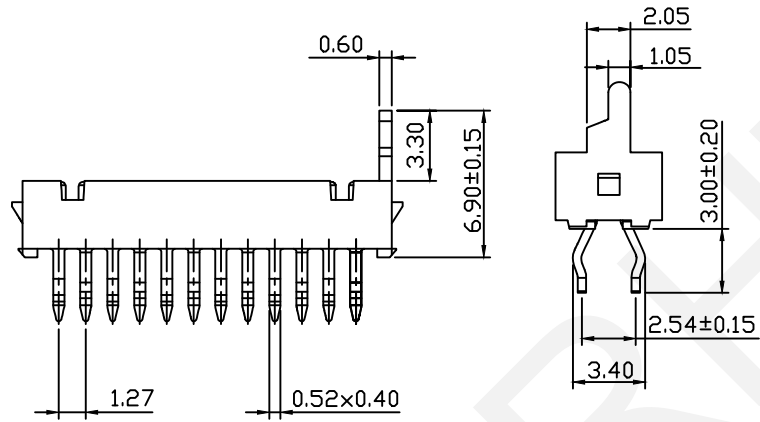

| Poles | DIM.A | DIM.B | Qty/Tube |
|-------|-------|-------|----------|
| 04 | 7.20 | 2.54 | 68 |
| 06 | 9.74 | 5.08 | 52 |
| 08 | 12.28 | 7.62 | 42 |
| 10 | 14.82 | 10.16 | 36 |
| 12 | 17.36 | 12.70 | 31 |
| 14 | 19.90 | 15.24 | 27 |
| 16 | 22.44 | 17.78 | 24 |
| 18 | 24.98 | 20.32 | 22 |
| 20 | 27.52 | 22.86 | 20 |
| 22 | 30.06 | 25.40 | 18 |
| 24 | 32.60 | 27.94 | 17 |
| 26 | 35.14 | 30.48 | 16 |

Order Information:

RHTAY04M-XX-R-□-□
Pitch:2.54mm
XX-No.of 04~26pin
Color:R-Red B-Black
Material: _____
A=PBT D=PA9T E=PA46
Packing: _____
NONE=Tube R=Reel

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

| | | | |
|---------------|----------------|--------------|-------------|
| UNITS:mm | SHEET SIZE: A4 | SCALE:--- | DRWN BY PAN |
| 0~3 | 3~18 | 18~50 | 50~120 |
| ±0.12 | ±0.15 | ±0.3 | ±0.5 |
| CHK'D BY FENG | | APPR BY ZHAN | |

Micro Match Connector
THIRD ANGLE PROJECTION
RHTAY04M-XX-R-□-□