
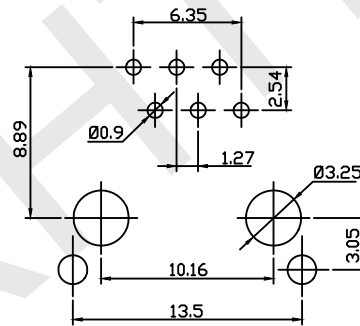


Material:
 Housing:PBT+Glass FilledPolyester
 Flammability Rating : UL 94 V-0
 Contacts: Phosphor Bronze
 Plating:Gold Plating

Electrical:
 Voltage Rating:125VAC
 Current Rating:1.5A
 Contact Resistance:30mΩ Max.
 Insulation Resistance: 500MΩ Min.
 Dielectric Strength:1000VAC Rms50Hz, 1 Min.
 Durability:600 cycles Min.
 Operation Temperature:-40℃+85℃

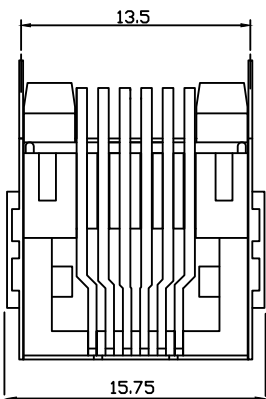

PCB Layout

Order Information


RHTLY18-6P6C-XX

Contacts:6P6C
 Plating Code:
 01-Fu" Gold Plating
 02-3u" Gold Plating
 03-6u" Gold Plating
 04-15u" Gold Plating
 05-30u" Gold Plating

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4				SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	THIRD ANGLE PROJECTION	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	RHTLY18-6P6C-XX	

RJ12-6P6C Modular jacks,with HALF Shield



RHTLY18-6P6C-XX