



SECTION A-A

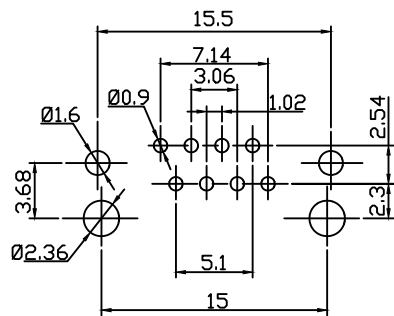

PCB Layout



Material:

Housing: PBT+Glass Filled Polyester

Flammability Rating : UL 94 V-0

Contacts: Phosphor Bronze Ø0.46mm

Plating: Gold Plating

Shield: Brass, Tin Plating

Electrical:

Voltage Rating: 125VAC

Current Rating: 1.5A

Contact Resistance: 30mΩ Max.

Insulation Resistance: 500MΩ Min.

Dielectric Strength: 1000VAC Rms 50Hz, 1 Min.

Durability: 600 cycles Min.

Operation Temperature: -40°C+70°C

Order Information

RHTLY22-8P8C-W-XX

Contacts: 8P8C

Plating Code:

01-1u" Gold Plating

02-3u" Gold Plating

03-6u" Gold Plating

04-15u" Gold Plating

05-30u" Gold Plating

RHTECP NINGBO RHT ELECTRONIC CO.,LTD


UNITS:mm SHEET SIZE: A4 SCALE:--- DRWN BY PAN

0~3 3~18 18~50 50~120 CHK'D BY FENG

±0.12 ±0.15 ±0.3 ±0.5 APPR BY ZHAN

RJ45-8P8C Modular jacks,with Shield

THIRD ANGLE PROJECTION



RHTLY22-8P8C-W-XX