


PCB Layout

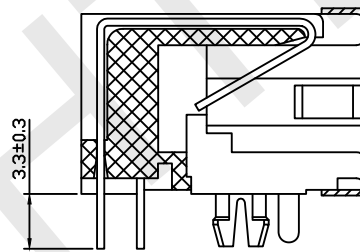

SECTION A-A

Material:

Housing: PBT+Glass Filled Polyester
 Flammability Rating: UL 94 V-0
 Contacts: Phosphor Bronze
 Plating: Gold Plating
 Shield: Brass, Plating

Electrical:

Voltage Rating: 125VAC
 Current Rating: 1.5A
 Contact Resistance: 30mΩ Max.
 Insulation Resistance: 500MΩ Min.
 Dielectric Strength: 1000VAC Rms 50Hz, 1 Min.
 Durability: 600 cycles Min.
 Operation Temperature: -40°C+70°C

Order Information

RHTLY39-8P8C - H - XX


Contacts: 8P8C
 H: HALF SHIELD
 Plating Code:
 01-1u" Gold Plating
 02-3u" Gold Plating
 03-6u" Gold Plating
 04-15u" Gold Plating
 05-30u" Gold Plating

NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

RJ45-8P8C Modular jacks, with HALF SHIELD

THIRD ANGLE PROJECTION



RHTLY39-8P8C-H-XX