
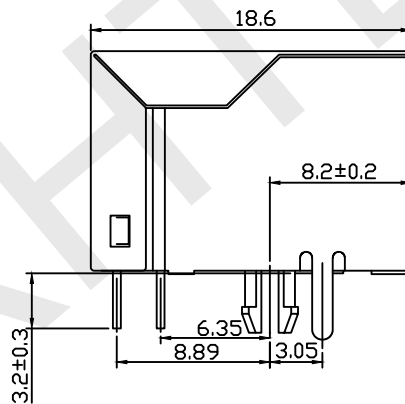


PCB Layout

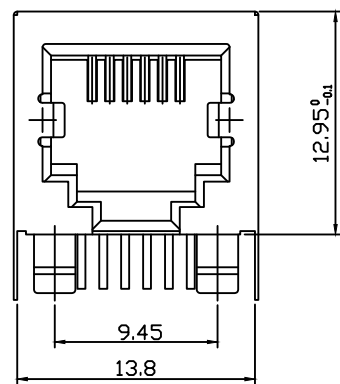

Material:

Housing: PBT+Glass Filled Polyester

Flammability Rating : UL 94 V-0

Contacts: Phosphor Bronze  $\phi 0.46$ mm

Plating: Gold Plating

Shield: Brass, Tin Plating

Electrical:

Voltage Rating: 125VAC

Current Rating: 1.5A

Contact Resistance:  $30m\Omega$  Max.

Insulation Resistance:  $500M\Omega$  Min.

Dielectric Strength: 1000VAC Rms 50Hz, 1 Min.

Durability: 600 cycles Min.

Operation Temperature:  $-40^{\circ}C$  to  $+70^{\circ}C$

Order Information

RHTLYC25-6P6C -1x1-W-1-XX

Contacts: 6P6C

Shield Peg Code:

1-Front 3.05mm

Plating Code:

01-Fu' Gold Plating

02-3u' Gold Plating

03-6u' Gold Plating

04-15u' Gold Plating

05-30u' Gold Plating

**RHTECP** NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE: ---

DRWN BY PAN

Modular jacks,PJ12-6P6C,with shield

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

RHTLYC25-6P6C-1x1-W-1-XX


$\pm 0.12$

$\pm 0.15$

$\pm 0.3$

$\pm 0.5$

APPR BY ZHAN



1

2

3

4

5

6

7

8

9